



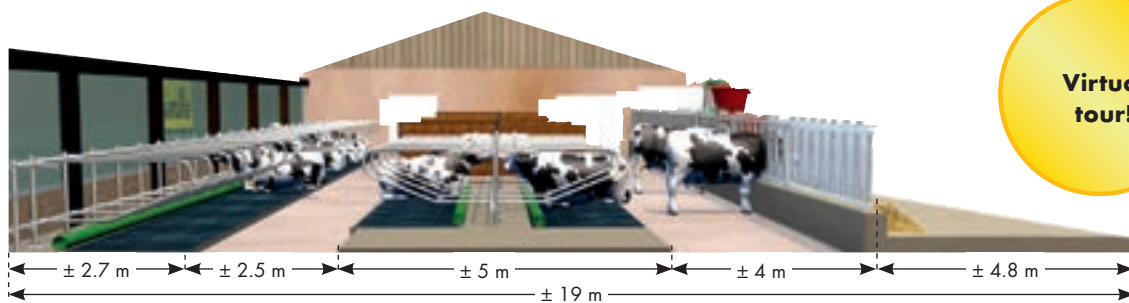

Barn and Stable Equipment - Dividers, Gates

Planning Examples	B2 - B11
Dividers	B12 - B27
Gates	B28 - B39
Feed Front for animal treatment	B40 - B41

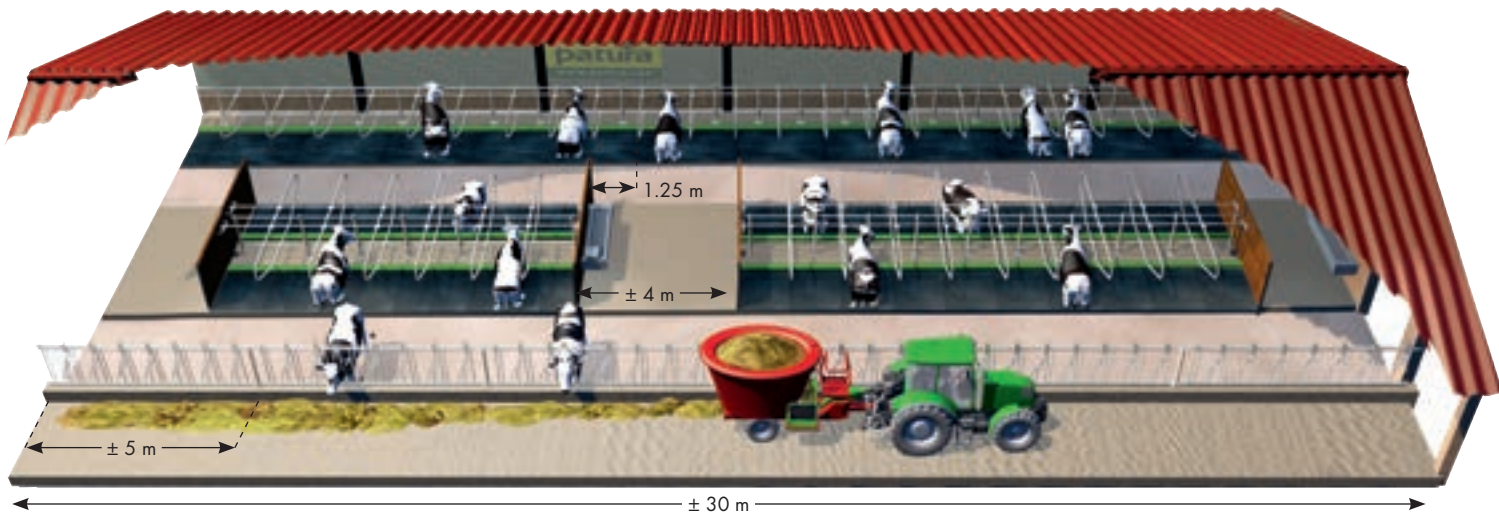

Freestall barn for dairy cows

Everything for the cow comfort

Today it is indisputable that dairy cows only achieve high performance and lead a long productive life if the cow comfort is optimal.

Cow comfort means:

- The available space corresponds to the requirements of large-framed animals (see below)
- Cold shed with sufficient fresh air supply but without draft for an animal-friendly climate
- Resting comfort with rubber mats or bedding
- Sufficient water supply with easily accessible drinking troughs

- Skid-proof surface without sharp edges and with easy dunging
- Good lighting conditions
- Provision for grooming behaviour with cow brushes
- Resting space for transit and calving cows and additional areas depending on the lactation stage or feeding technique (transponder/TMR)

Functional dimensions in the dairy shed:

Cubicle length to a wall:	2.70 - 2.80 m
Cubicle length face to face:	2.30 - 2.50 m
Cubicle width:	± 1.25 m
Cubicle depth (to brisket board):	± 1.85 m
Neck bar (from edge):	± 1.85 m
Cubicles per animal:	1:1
Alley width resting area:	2.00 - 2.50 m
Alley width feeding area:	3.50 - 4.00 m
Cross-walk:	± 2.50 m
Cross-walk with trough:	3.00 - 4.20 m
Feed spaces per animal:	1:1 up to 1:1.2
Feed space width:	0.65 - 0.80 m
Height feed table wall:	50 - 55 cm
Height feed table (above floor):	15 - 20 cm
Height neckbar (cubicle):	± 1.25 m

Functional dimensions young cattle:


Cubicles:

Age (months)	Weight	Width	Cubicle Length	Cubicle Divider Length
4 - 6	130 - 200 kg	75 cm	150 cm	130 cm
7 - 12	200 - 350 kg	95 cm	180 cm	150 cm
13 - 18	350 - 500 kg	105 cm	200 cm	180 cm
> 18	> 500 kg	120 cm	230 cm	> 200 cm

Feed Front:

Age (months)	Feed space width	Neck width	Height feed table wall
4 - 6	40 cm	10 cm	30 cm
7 - 12	50 cm	12 cm	40 cm
9 - 18	60 cm	16 cm	40 cm
> 18	70 cm	19 cm	55 cm

All dimensions are non-binding guidelines

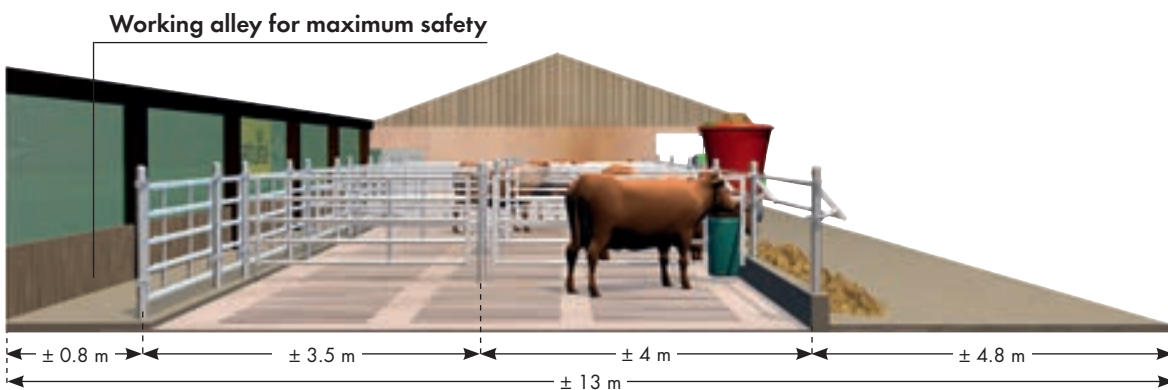

Open barn for beef bulls

Efficient beef bull farming

In beef bull farming, the use of open barns with fully slotted floors is widespread. For economical and achievement-oriented production the following points are important:


- Correct density level and group size
- Animal to feeding place ratio 2:1
- Group size not more than 16 - 18 animals
- Supply feeding
- Pen size in this system must be aligned to the terminal weight
- Allow for safe herding facilities: An 80 cm wide alley behind the pens which can also be used as inspection walkway has proven effective
- Pen dividers: sturdy 4 or 5 bar panels
- Drinking troughs: built into dividers for protection



Functional dimensions in a beef bull shed:

Depth of the pen:	3.50 - 8.00 m
Resting area per bull up to 350 kg:	2.00 m ²
Resting area per bull up to 500 kg:	2.50 m ²
Resting area per bull up to 650 kg:	2.75 m ²
Resting area per bull over 650 kg:	3.00 m ²
Feed spaces per animal:	1:1 bis 1:2
Feed space width per bull up to 350 kg:	0.55 m
Feed space width per bull up to 500 kg:	0.60 m
Feed space width per bull up to 650 kg:	0.65 m
Feed space width per bull over 650 kg:	0.75 m
Sweep alley width:	0.80 m

All dimensions are non-binding guidelines

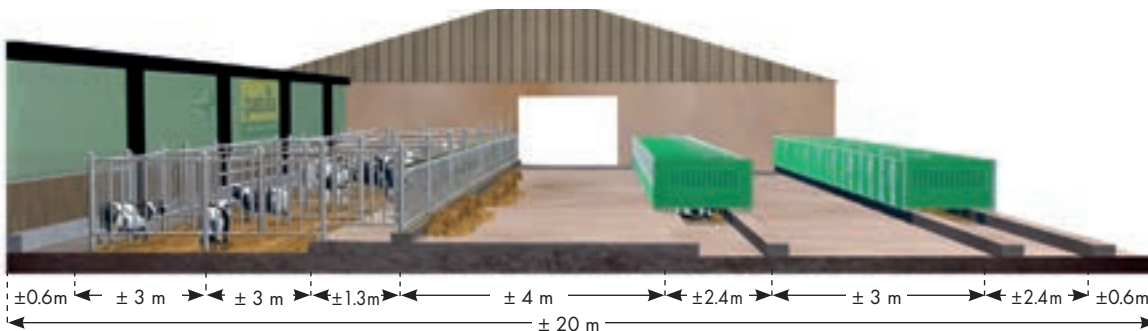

Calf barn with fix installed boxes

In order to successfully raise calves, the management in relation to penning, feeding and health must be perfectly matched.

One possibility is a calf barn with fixed boxes followed by growing in group pens. The structure of the stall and the construction of boxes ensure an optimum air exchange. As a result, the bacterial load is considerably reduced and thus the health of the calves is significantly increased.

1. Keeping calves up to 10-12 weeks of age in permanently installed veal pens:

- Good stall overview
- Due to removable walls group boxes are quickly and easily possible
- Calves can stay until in the boxes until weaning
- Can be combined with automatic feeding systems
- Easy, fast cleaning due to an almost complete disassembly of the boxes
- Installation of veal pens on two solid bases, which serve as sliding edge during mechanical manure removal

2. Keeping calves in group pens after the 8th week of life up to 6 months:



- Through a consistent stable climate the critical transition phase is facilitated
- Calves can be fixed by a self-locking feed front
- Automatic drinking or drinking trough suckler buckets at the feed front is possible
- Two-room beddedpack barn with slatted floors and straw
- Quick manure removal by one person with yard loader



Functional dimensions in calf barn with permanently installed pens:

Dimension individual pen:	± 2.5 m ²
Pen / Calves:	1:1
Ventilation area:	± 0.6 m
Supply passage for calv pens:	± 2.50 m
Height of wall for feed table:	± 30 cm
Feed spaces per animal:	1:1
Entry:	±1.20 - 1.50 m

All dimensions are non-binding guidelines

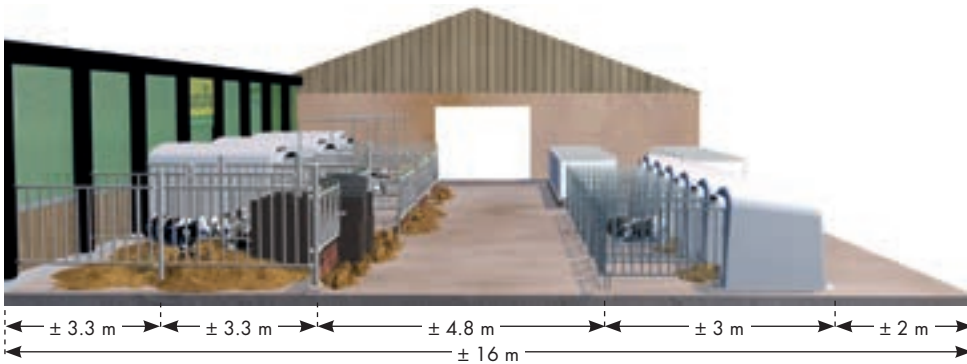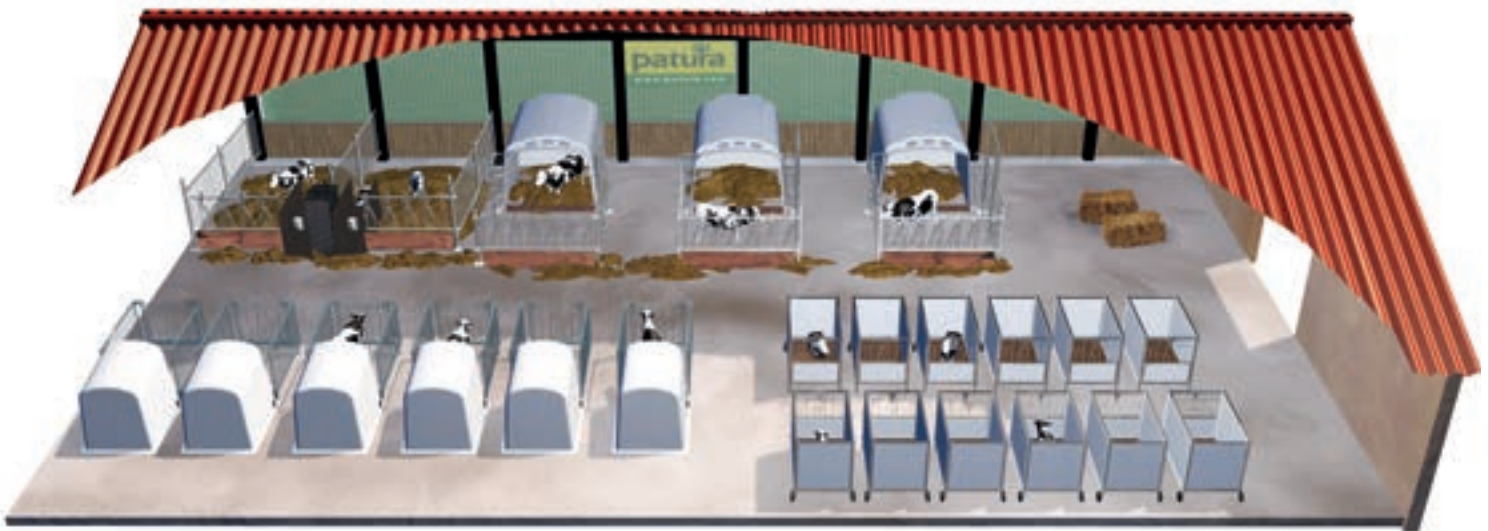

Calf barn with mobile pens

In a calf barn with mobile pens the type and number of mobile iglus or pens can be varied. An in-out method is therefore much easier with calves. We offer holding systems which offer to keep calves up to 8 weeks individually in mobile pens. After that, they can grow in groups in large iglus or in a group pen. The group pens can be provided as two-room barns with slatted floor and straw.



Area dimensions in a calf shed:

(As per German calf farming regulations)

For calves (0-8 weeks) in an individual pen:

< 2. weeks	(Length x width):	1.2 m x 0.8 m
3. - 8. weeks	(Length x width):	1.6 - 1.8 ¹ x 1.0 m

For calves after 8 weeks of life is group penning prescribed:

≥ 9. weeks ²	(Length x width):	1.8 - 2.0 ¹ x 1.2 m
-------------------------	-------------------	--------------------------------

For calves (0 – 6 months) in groups:

		min.	Recommendation
Resting area ³	< 150 kg:	1,5m ²	1.8 - 2.2 m ²
Resting area ³	150 - 220 kg:	1,7m ²	2.0 - 2.5 m ²
Resting area ³	> 220 kg:	1,8m ²	2.3 - 2.8 m ²



¹ When trough is installed inside the box

² Group penning prescribed: Individual penning only allowed, if less than 3 calves per group

³ For calves 3-8 weeks age: min. dimension 4.5 m²

For calves 8 weeks up: min. dimension 6 m²

All dimensions are non-binding guidelines

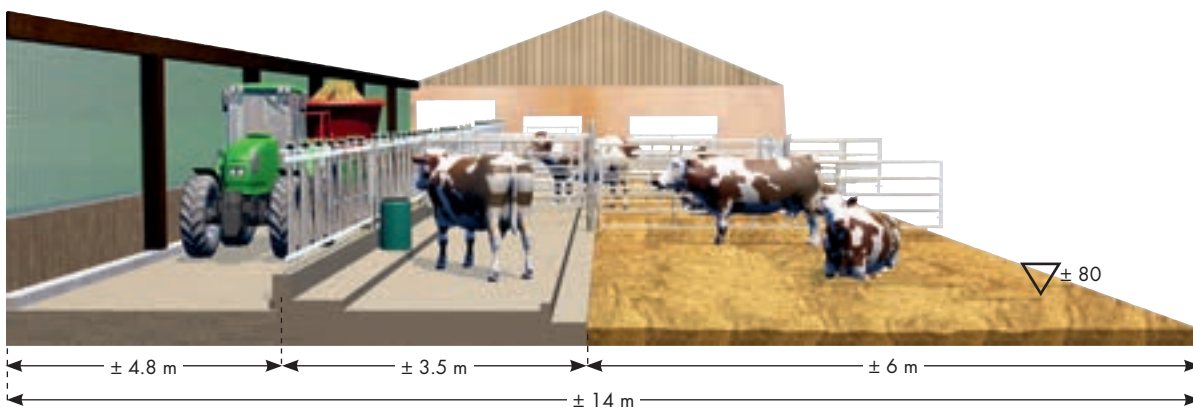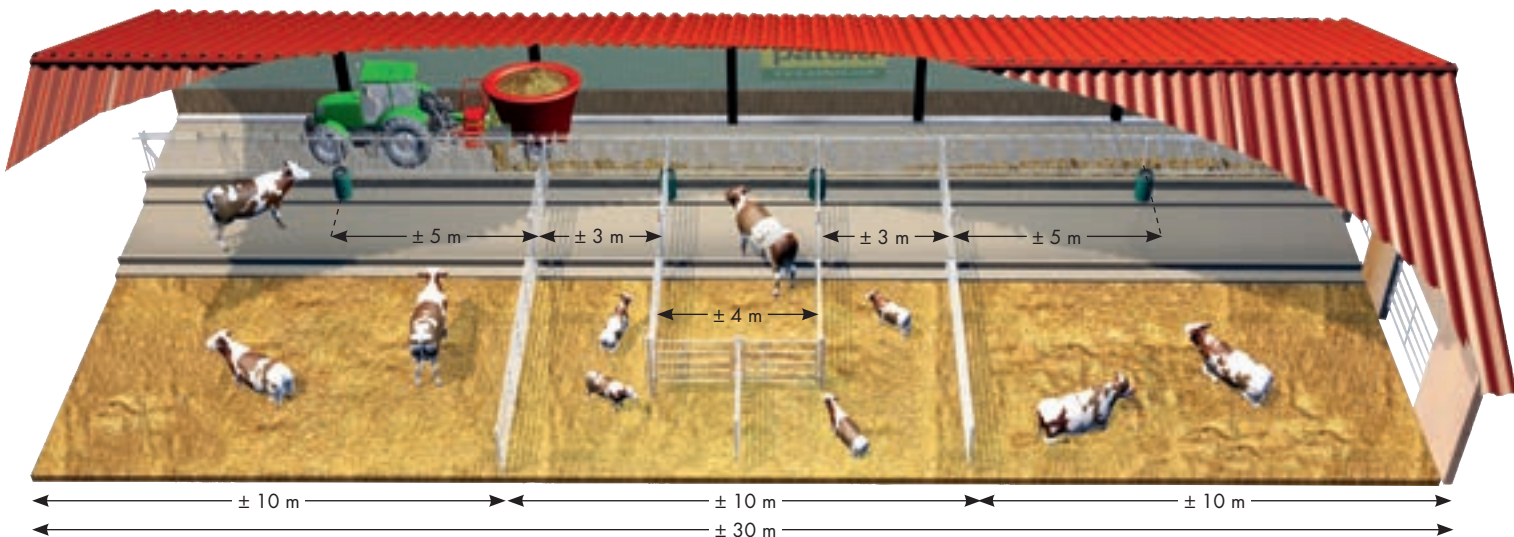

Two-room bedded pack barn for suckler cows

Suckler cow farming on the upswing

Germany has seen a positive trend in beef cattle farming in the last few years. As a rule, raising of suckler cows is done on the pasture. It is important to have a cost-effective stable, which offers an efficient breeding during the winter time without high workload.

The following solutions are possible:

- Single-room bedded pack barn with bedding
- Single-room bedded pack barn with raised feeding area
- Two-room bedded pack barn with separate feeding and resting space
- Freestall barn

The ideal solution with regard to building costs, work load and animal comfort:



- Two-room bedded pack barn with feeding and resting space
- Separate area for calves which only calves can enter
- Separate calving, sick animal and breeding bull pen



Functional dimensions in a two-room bedded pack barn for suckler cows:

Depth of the resting area:	6.00 - 6.50 m
Resting area requirement per cow:	± 6.0 m ²
Resting area requirement per calf:	1.2 - 2.0 m ²
Alley width feeding area:	3.50 - 4.00 m
Feed spaces per animal:	1:1 up to 1:1.2
Feed space width:	0.67 - 0.75 m
Bedding requirements - kg/head/day:	5 - 6 kg
Bedding requirements - dt/head/200 days:	10 - 12 dt
Straw requirements - ha/head/200 days:	0.2 - 0.25 ha

All dimensions are non-binding guidelines

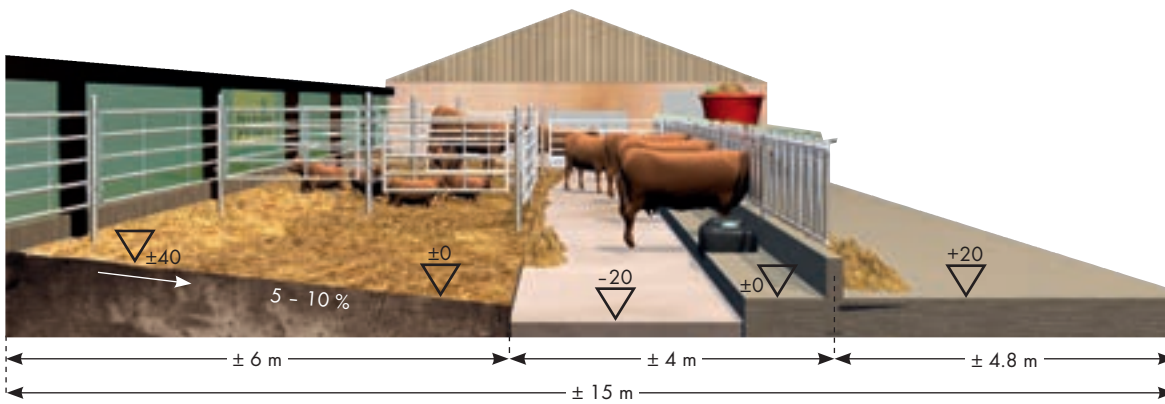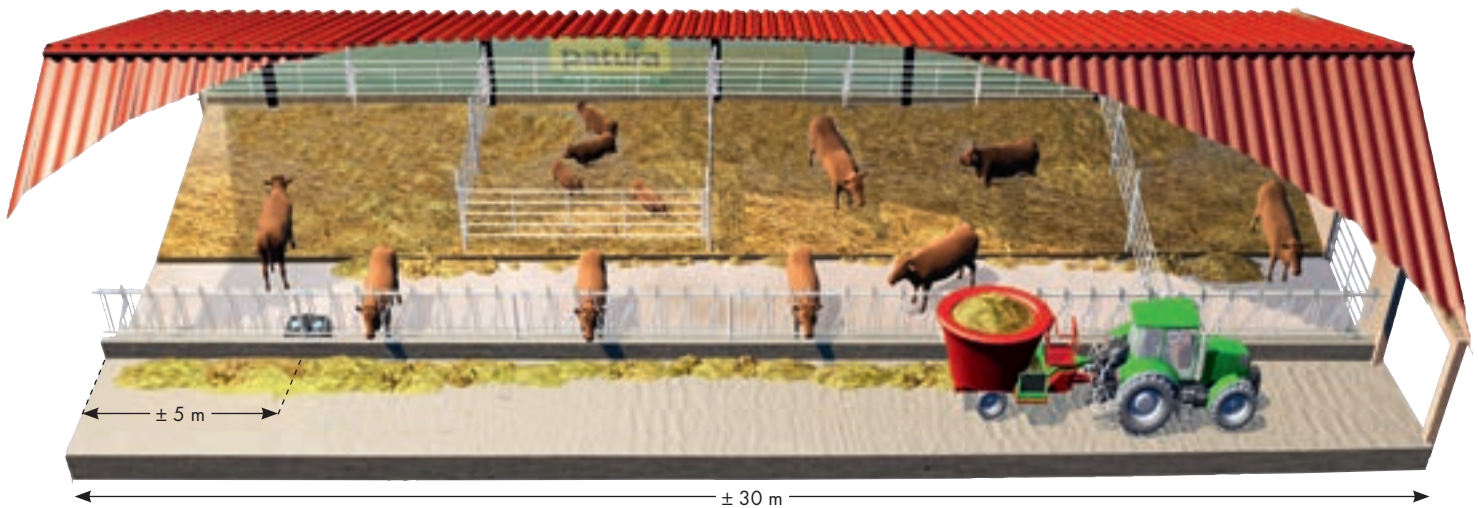

Two-room sloping floor shed for suckler cows

Animal-friendly shed system with low straw requirement

Animal-friendly methods that are widespread in suckler cow farming are almost always based on bedded resting areas. In order to minimise the bedding usage a sloping floor shed should be considered.


The animals at the correct stocking rate on a bedded, sloping resting area tread the soil down to a level surface, which is cleaned regularly – i.e. daily. This is done by automatic manure removal system, or by scraper. In large herds, it is advisable to install dividers in the resting area, so as to avoid territorial disputes. As a matter of principle, building in supports into the manure area should be avoided, so as not to interfere with the manure flow. In suckler cow farming, the provision of a pen for calves which the calves seek out for themselves right after birth, is important. If needed, the calves can also be fed there separately. Separate pens for breeding bulls are required, as are calving pens for winter calving. A subdivision of the herd into male and female animals may be considered. Water troughs should preferably be placed near the area of the feed tables. In view of the extensive area, care should be taken to ensure frost-free operation, ball-valve or heated individual bowls are appropriate here.



Essential dimensions for a sloping floor shed:

Depth of the resting area:	4.00 – 7.00 m
Resting area requirement per cow:	± 4,5 m ²
Resting area requirement per calf:	1.2 – 2.0 m ²
Alley width feeding area:	3.00 – 4.00 m
Feed spaces per animal:	1:1 up to 1:1.2
Feed space width:	0.67 – 0.75 m
Slope of resting area:	5 – 8 %
From a depth of 3 m	6 – 10 %
Steeper slope for lighter animals and lower stock rate	
Bedding requirements - kg/head/day:	3 – 5 kg
Bedding requirements - dt/head/200 days:	6 – 10 dt
Straw requirements - ha/head/200 days:	0.12 – 0.2 ha

All dimensions are non-binding guidelines

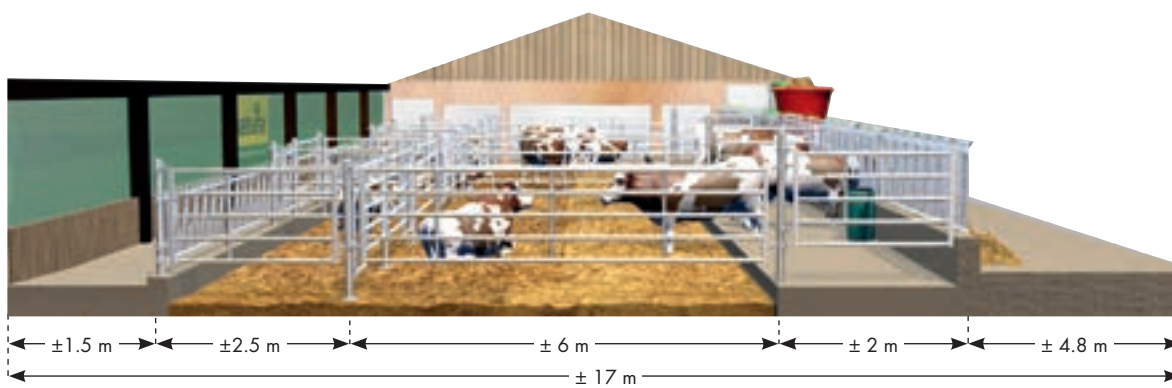

Single-room bedded pack barn with raised feeding area for suckler cows

Livestock-friendly housing system for the professional suckler cow farmer

For the farmer of a large quantity of suckler cows especially for winter calving:

- Stable system needs to be efficient
- Optimum supervision possibilities

Second feed table

- Offers access to the rear stable range
- That is where the calves are – selective and separate supplement feeding
- That is where the calving area is – optimum monitoring of the calving

Raised feeding area:

- Continuous easy access at the feed front to the feed table despite of deep litter
- Depth: torso length + 30 cm

For larger herds:

- Dividers in the resting area, so as to avoid territorial disputes
- Optional: sub-divide a herd into cows with male and female calves

Water troughs:



- Install in the area of the feed table
- In view of the extensive area care should be taken to ensure frost-free operation
- Ball-valve or heated individual bowls



Essential functional dimensions for a single-room bedded pack barn with raised feeding area:

Depth of the resting area:	4.00 – 5.00 (6.00) m
Depth of feeding area (heavy livestock):	1.80 m
Depth of feeding area (young stock):	1.40 m
Depth of feeding area (calves):	1.20 m
Resting area requirement per cow:	± 6 m ²
Feed spaces per animal:	1:1 up to 1:1.2
Feed space width:	0.67 – 0.75 m
Resting area requirement per calf:	1.2 – 2.0 m ²
Bedding requirements - kg/head/day:	8 – 10 kg
Bedding requirements - dt/head/200 days:	16 – 20 dt
Straw requirements - ha/head/200 days:	0.32 – 0.40 ha

All dimensions are non-binding guidelines

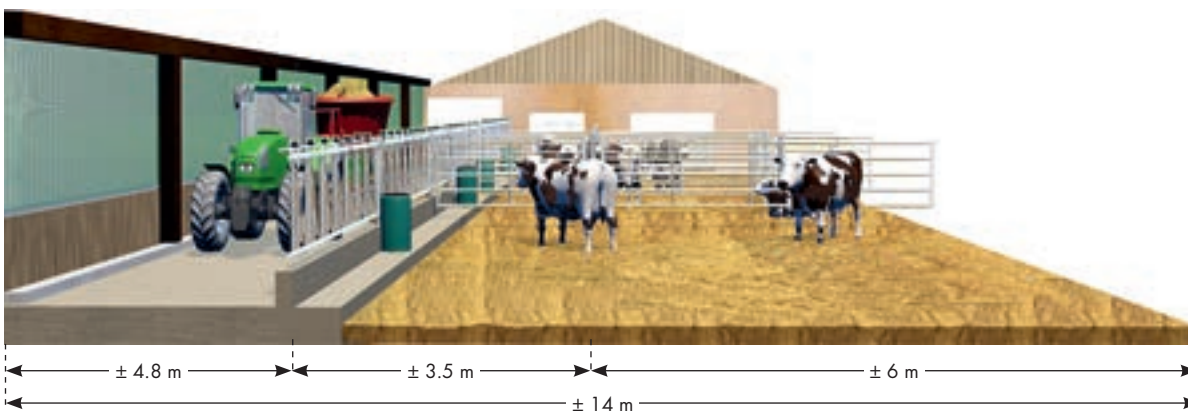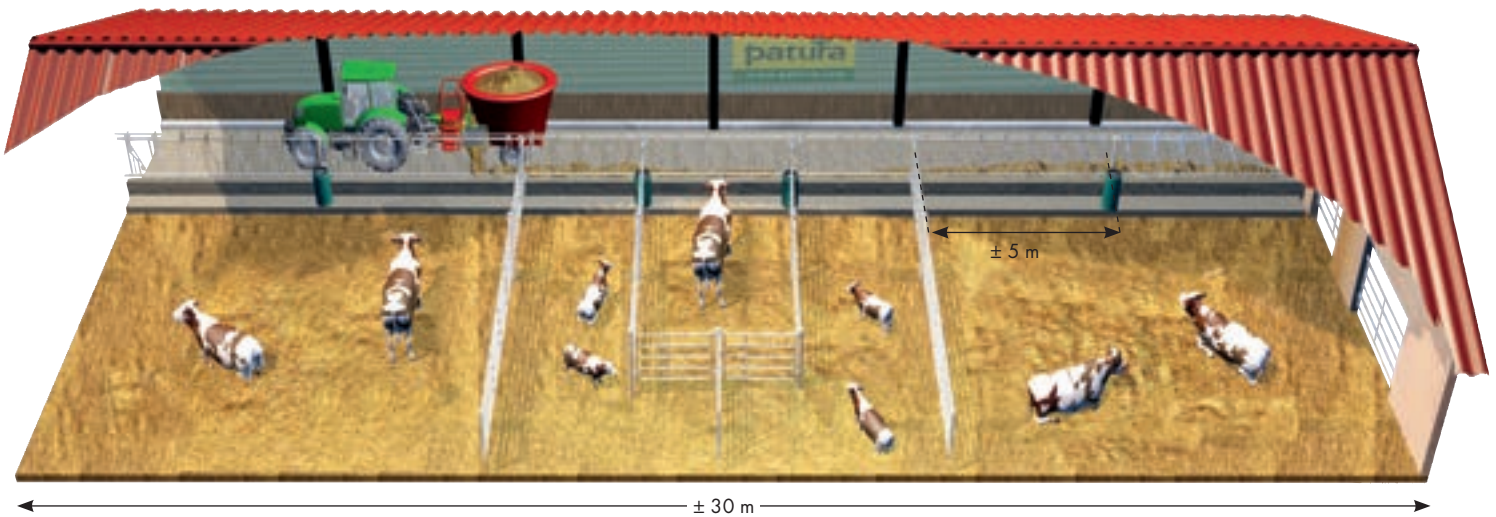

Single-room bedded pack barn for suckler cows

Single-room bedded pack barn for suckler cows

Useful in the following situations as simple and animal-friendly livestock housing

- Utilisation of old buildings
- Level surfaces in new sheds may be used alternatively (machine hangar, straw storage)

To consider in comparison to the two-room bedded pack barn:

- Considerably higher straw requirement
- A step of 40 cm height and 40 cm width should be provided at the feed table so that the animals are always level with the feed front even with increasing manure

For larger herds:

- Dividers in the resting area, so as to avoid territorial disputes
- Option: sub-divide a herd into cows with male and female calves

Important: separate pen for calves

- Protection for calves right after birth
- Supplement feeding possible

Special pens:

- For breeding bulls
- Calving pens for winter calving

Water troughs:

- Install near the feed table
- Ensure frost-free operation


Virtual tour!



Functional dimensions for a single-room bedded pack barn for suckler cows:

Depth of the resting area:	≥ 6.00 m
Resting area requirement per cow:	± 8 m ²
Resting area requirement per calf:	1.2 - 2.0 m ²
Height of step to feed table:	35 - 50 cm
Width of step to feed table:	approx. 40 cm
Feed spaces per animal:	1:1 up to 1:2
Feed space width:	0.67 - 0.75 m
Bedding requirements - kg/head/day:	8 - 10 kg
Bedding requirements - dt/head/200 days:	16 - 20 dt
Straw requirements - ha/head/200 days:	0.32 - 0.40 ha

All dimensions are non-binding guidelines

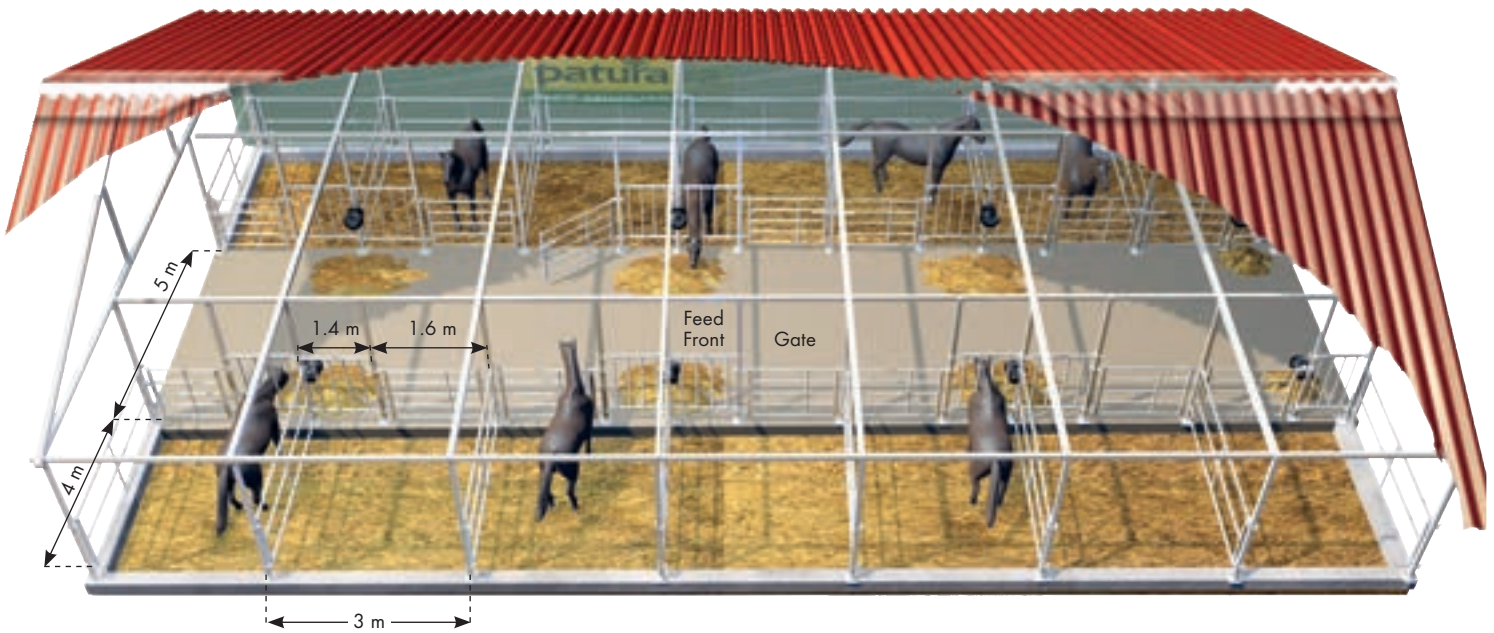

Modern, cost-effective open stable concept for horses

- Optimal stable climate for man and horse
- Calm animals through lively social contact
- Rational feed technique
- Only 10 % of the time required for mucking out compared to conventional stables
- Simple, cost-effective, do-it-yourself assembly using extendable dividers

Recommended
by
veterinarians



High volume of air and an open peak facilitate quick exit of all noxious gases in the stable. Wind protection systems in the prevailing wind direction prevent drafts in the stable



1.6 m wide gates allow optimum access to each stall



Horse feed front and a 25 cm raised feed platform provide an animal-friendly feeding



For efficient manure removal by loader, all box stall partition walls can fold away - each stall row is machine accessible along the entire length

Dividers for horses

With PATURA dividers, up-to-date horse stables can be set up to suit all requirements for light, air circulation and social contacts of horses. Due to the extensibility they adapt to almost all building situations. For lots of structural settings PATURA offers a diverse programme of special components helping to solve problems on-site.

Our recommendations:

	Divider R4 Bar spacing 30 cm	Divider R3 Bar spacing 45 cm	Divider R2 Bar spacing 58 cm	Light Divider Bar spacing 23 cm	Divider T3 Bar spacing 37 cm
Box stalls, individual	✓✓	✓			
Paddocks	✓	✓✓			✓
Turnout area		✓✓	✓		✓
Foals				✓	



Open, low partitions for easy social contact between each other. Generous box stall dimensions (3 x 4 m) for optimal free moving space



Animal-friendly horse keeping with outdoor paddocks

Dividers for cattle

PATURA offers a complete programme of dividers for construction of cubicles in loose housing stables. Due to the extendability they can be adapted to almost any building situation. PATURA offers you a wide range of special parts for the solution of special requirements on site.

Our recommendations:

	Divider R5 Bar spacing 20 cm	Divider R4 Bar spacing 30 cm	Divider R3 Bar spacing 45 cm	Divider R2 Bar spacing 58 cm	Light Divider Bar spacing 23 cm	Divider V Bar spacing 15 cm	Calf divider Bar spacing 10 cm	Divider T3 Bar spacing 37 cm
Dairy cows		✓	✓✓	✓				✓
Suckler cow farming	✓✓	✓						
Young stock		✓✓			✓			
Calves up to 6 months					✓✓		✓	
Beef bulls	✓	✓✓				✓		

Your advantages:

- Installation: for 1 - 7 m sections possible
- Flexibility: all dividers with horizontal bars are extendable by 1 m
- Optimal stability for the intended range of application
 - Heavy dividers "R": divider base section, sturdy 2" tubing (60.3 mm), extension section 1 1/2" tubing (48.3 mm)
 - Light dividers: divider base section: 1 1/4" tubing (42.4 mm), extension section 1" tubing (33.7 mm)
 - Divider for calves: upper and lower tubing 1 1/4" (42.4 mm), vertical bars 3/4" (26.9 mm)
 - Divider V: upper and lower tubing: 2" (60.3 mm), vertical bars: 1 1/4" (42.4 mm)
- Adjustment of ground clearance: turning the heavy and light dividers raises the ground clearance by 20 cm
- For all dividers and gates: Cut the extension section for shorter installation lengths


The solution for special requirements:

- Calf Creep
- Man Escape
- Recess for troughs
- Twin-Tube Design for temporary dividers




Extension section with man escape


Stability and variability are our strengths



Heavy-duty mounting on sturdy 10 mm hinge plates with retaining bolt



Adjustable lower mounting using M22 eye bolt to compensate for angled mounting post



Tube-in-tube assembly with setscrew for easy length adjustment up to a metre




Special extension section with recess for drinking bowl



Dividers with calf creep in dairy farming


Light Dividers

- The lightweight alternative for calves, young stock until the age of 6 months

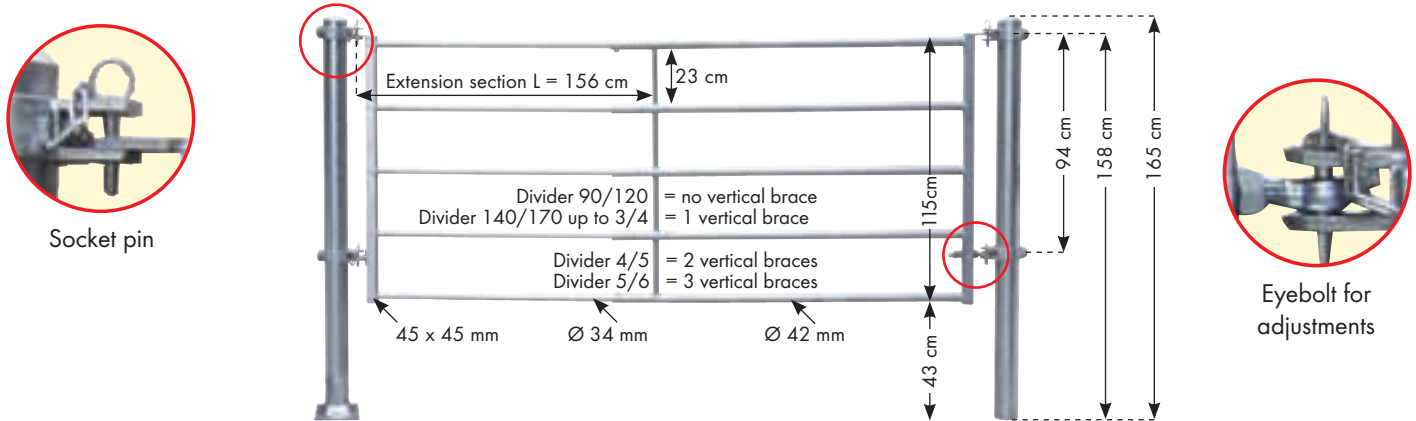


Light Divider with covering, for Calves

- For a reduced germ transmission and thus reduced risk of infection
- Covered divider for group pens

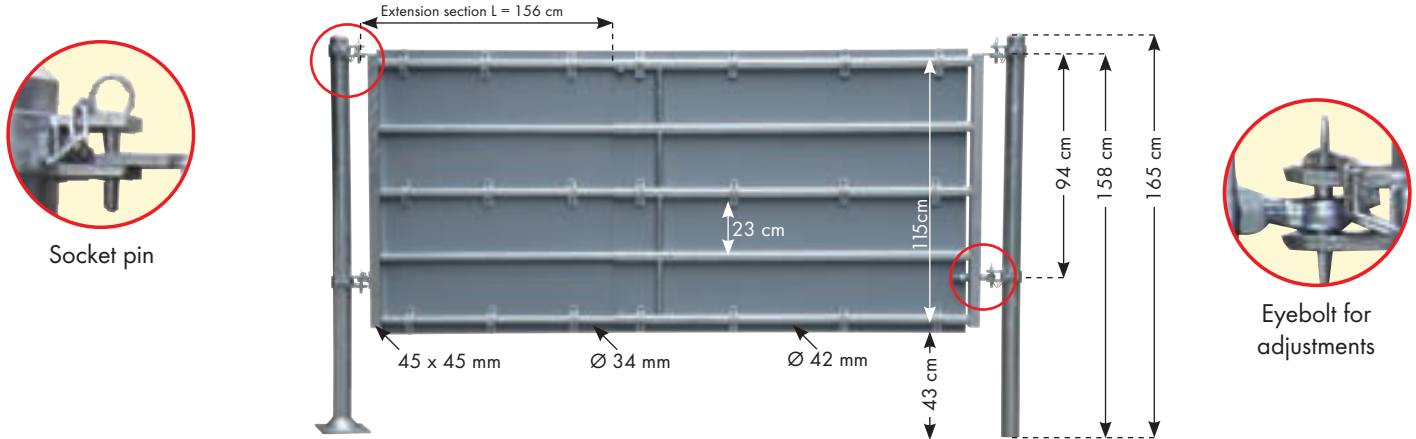


Calf Dividers

- For calves up to 6 months
- Vertical bars prevent calves from climbing up

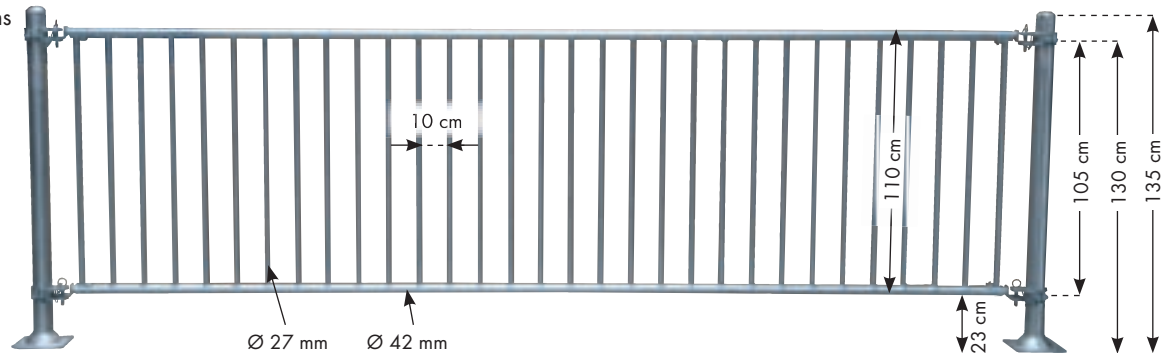

Dividers V

- Reliable, heavy-duty execution
- For beef cattle
- Vertical bars prevent from climbing up

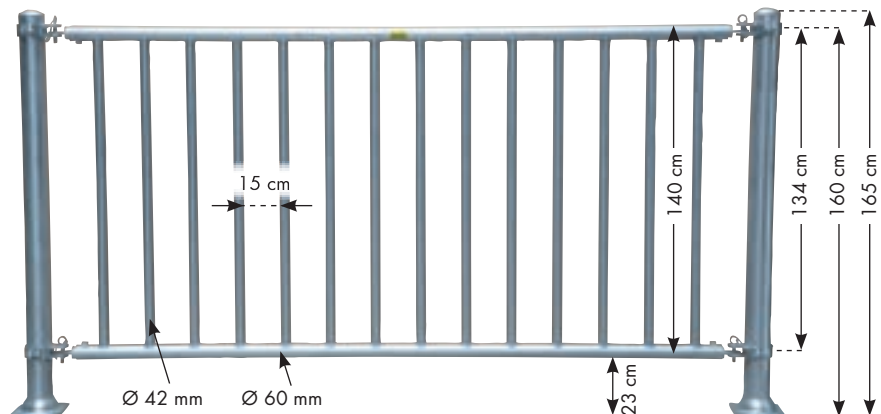

Dividers R3, R4, R5


- Reliable, heavy-duty execution
- Wide range of application from calf to beef bull
- Large selection of special components for almost all structural settings



Socket pin




Eyebolt for adjustments

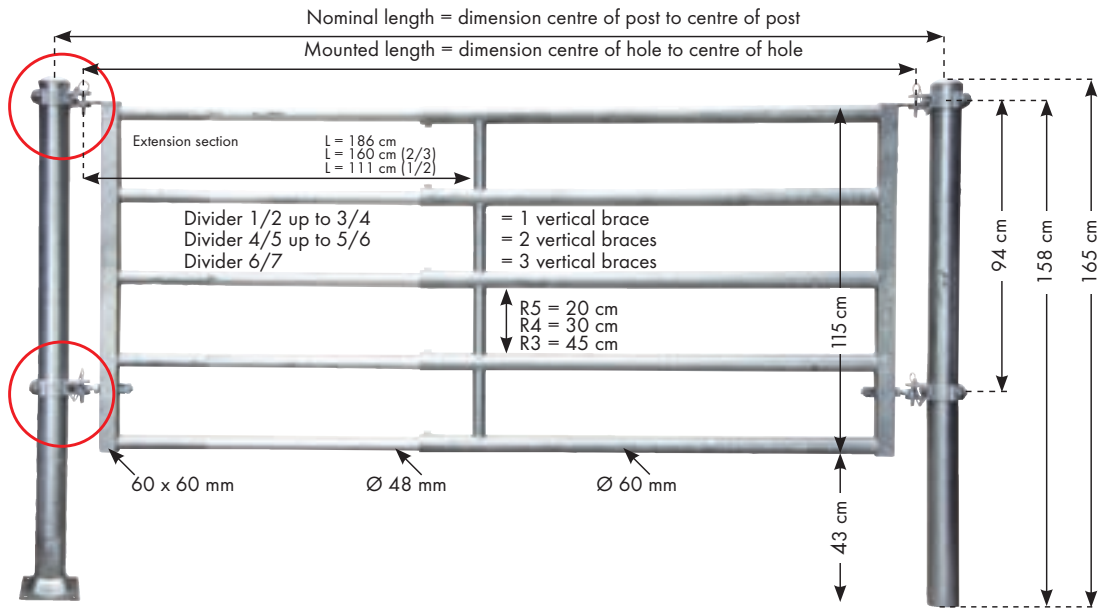


Dividers T3

- Medium-heavy execution for use in dairy housing
- Ideal height when using slat scrapers
- Suitable for horses

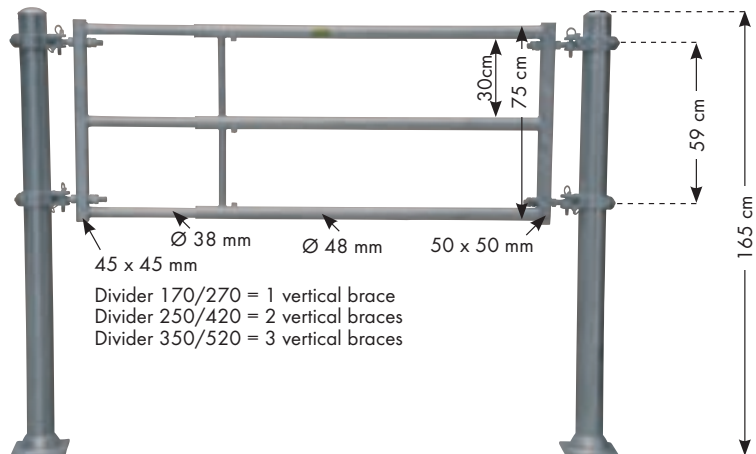


Dividers R2

- For dairy cattle
- For horses



Pipe protects eyebolt thread

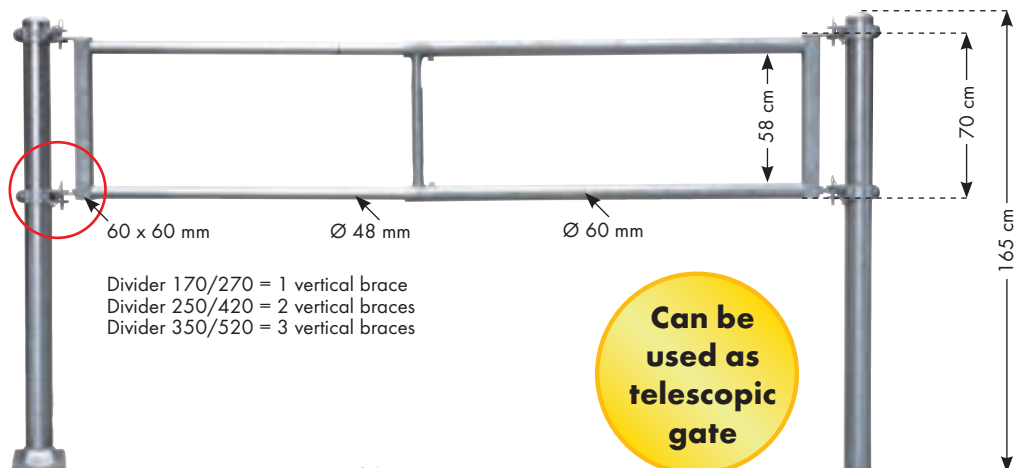

Can be used as telescopic gate

Please order posts and assembly accessories separately




Description

Type

Ref.

Weight

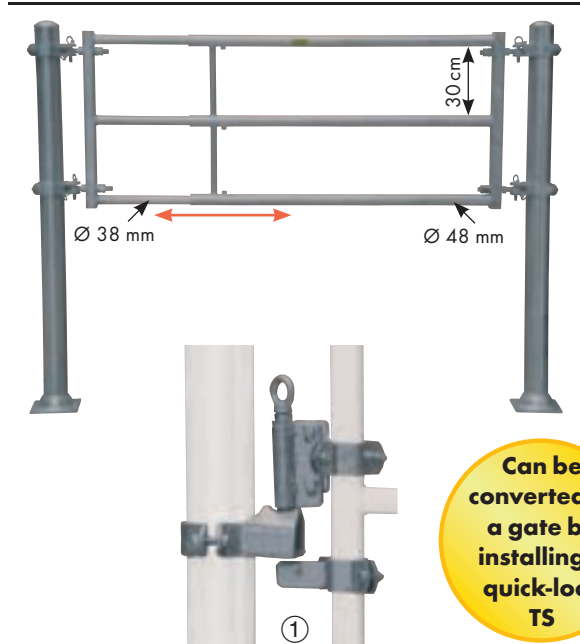


Divider T3 (170/270)	323594	26 kg
Divider T3 (250/420)	323595	39 kg
Divider T3 (350/520)	323596	49 kg

	T3 (170/270)	T3 (250/420)	T3 (350/520)
Nominal length:	170 - 270 cm	250 - 420 cm	350 - 520 cm
Mounted length:	150 - 250 cm	230 - 400 cm	330 - 500 cm
Mounted length base section:	140 cm	220 cm	320 cm
Mounted length extension section:	135 cm	215 cm	265 cm

① **Quick-Lock TS for light dividers (Incl. clamps)** **304107** 3.6 kg

Can be converted to a gate by installing a quick-lock TS

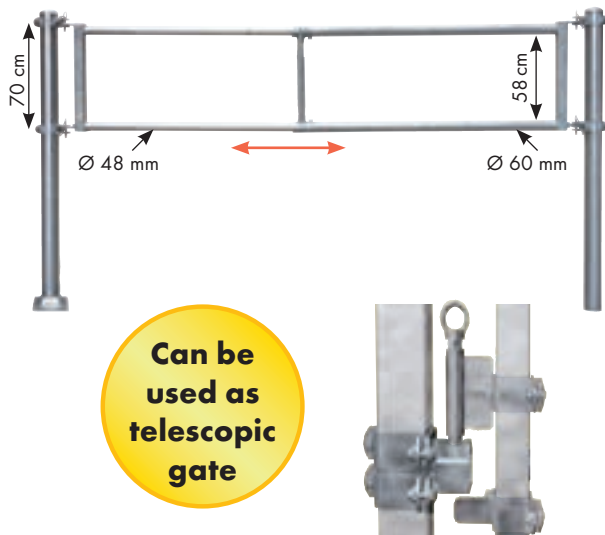


Divider R2 (170/270)	304210	31 kg
Divider R2 (250/420)	304211	43 kg
Divider R2 (350/520)	304212	56 kg

	R2 (170/270)	R2 (250/420)	R2 (350/520)
Nominal length:	170 - 270 cm	250 - 420 cm	350 - 520 cm
Mounted length:	150 - 250 cm	230 - 400 cm	330 - 500 cm
Mounted length divider base section:	142 cm	222 cm	327 cm
Mounted length divider extension section:	142 cm	222 cm	272 cm

① **Quick-Lock TS for dividers R (Incl. clamps)** **304108** 3.7 kg

Can be used as telescopic gate

The lengths of the base and extension sections are optimised so the extension area of the dividers R2 is now longer (see information to mounted length). By using the quick-lock TS for dividers R (304108) every divider R2 can be used as solid telescopic gate.

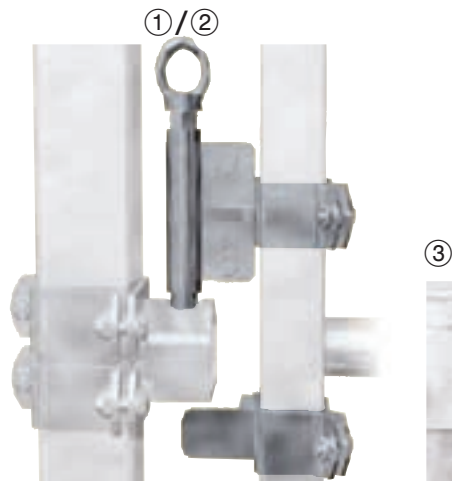

① **Quick-Lock TS for light dividers (Incl. clamps)** **304107** 3.6 kg
 ② **Quick-Lock TS for dividers R (Incl. clamps)** **304108** 3.7 kg
 ③ **Safety Screw for feed fronts and dividers (qty 10)** **334285** 1.0 kg



French Innovation Award

Please order posts and assembly accessories separately






Type Ref. Weight Description


Divider R5 (1/2)	323050	51 kg
Divider R5 (2/3)	323051	73 kg
Divider R5 (3/4)	323052	90 kg
Divider R5 (4/5)	323053	113 kg
Divider R5 (5/6)	323054	130 kg
Divider R5 (6/7)	323058	152 kg

	R5 (1/2)	R5 (2/3)	R5 (3/4)	R5 (4/5)	R5 (5/6)	R5 (6/7)
Nominal length:	145 - 220 cm	195 - 295 cm	295 - 405 cm	395 - 505 cm	495 - 605 cm	595 - 705 cm
Mounted length:	125 - 200 cm	175 - 275 cm	275 - 385 cm	375 - 485 cm	475 - 585 cm	575 - 685 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm	561 cm
Mounted length divider extension section:	111 cm	161 cm	186 cm	186 cm	186 cm	186 cm

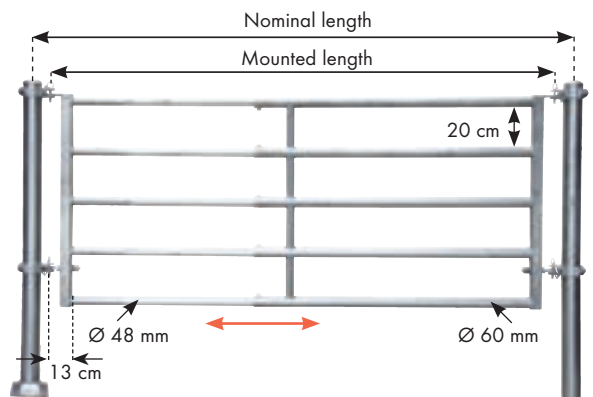


Divider R4 (1/2)	323020	53 kg
Divider R4 (2/3)	323021	60 kg
Divider R4 (3/4)	323022	72 kg
Divider R4 (4/5)	323023	93 kg
Divider R4 (5/6)	323024	106 kg
Divider R4 (6/7)	323025	128 kg

	R4 (1/2)	R4 (2/3)	R4 (3/4)	R4 (4/5)	R4 (5/6)	R4 (6/7)
Nominal length:	145 - 220 cm	195 - 295 cm	295 - 405 cm	395 - 505 cm	495 - 605 cm	595 - 705 cm
Mounted length:	125 - 200 cm	175 - 275 cm	275 - 385 cm	375 - 485 cm	475 - 585 cm	575 - 685 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm	561 cm
Mounted length divider extension section:	111 cm	161 cm	186 cm	186 cm	186 cm	186 cm

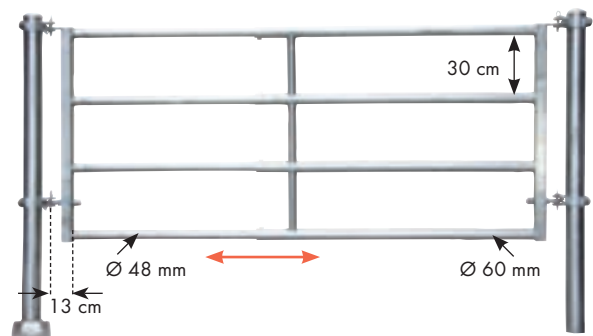

Divider R3 (1/2)	323000	36 kg
Divider R3 (2/3)	323001	49 kg
Divider R3 (3/4)	323002	61 kg
Divider R3 (4/5)	323003	73 kg
Divider R3 (5/6)	323004	87 kg

	R3 (1/2)	R3 (2/3)	R3 (3/4)	R3 (4/5)	R3 (5/6)
Nominal length:	145 - 220 cm	195 - 295 cm	295 - 405 cm	395 - 505 cm	495 - 605 cm
Mounted length:	125 - 200 cm	175 - 275 cm	275 - 385 cm	375 - 485 cm	475 - 585 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	111 cm	161 cm	186 cm	186 cm	186 cm

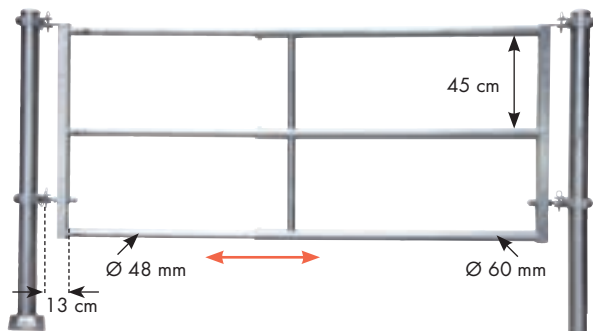

Please order posts and assembly accessories separately






Description

Type


Ref.

Weight

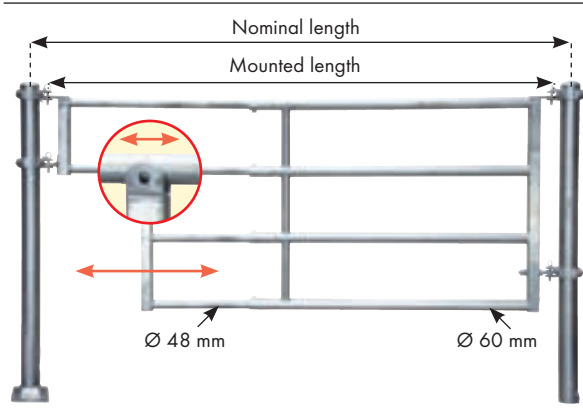


Divider Water Trough R4 (1/2)	323220	58 kg
Divider Water Trough R4 (2/3)	323221	64 kg
Divider Water Trough R4 (3/4)	323222	78 kg
Divider Water Trough R4 (4/5)	323223	96 kg

	R4 (1/2)	R4 (2/3)	R4 (3/4)	R4 (4/5)
Nominal length:	205 - 295 cm	255 - 355 cm	355 - 455 cm	455 - 555 cm
Mounted length:	185 - 275 cm	235 - 335 cm	335 - 435 cm	435 - 535 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm
Mounted length divider extension section:	211 cm	211 cm	211 cm	211 cm

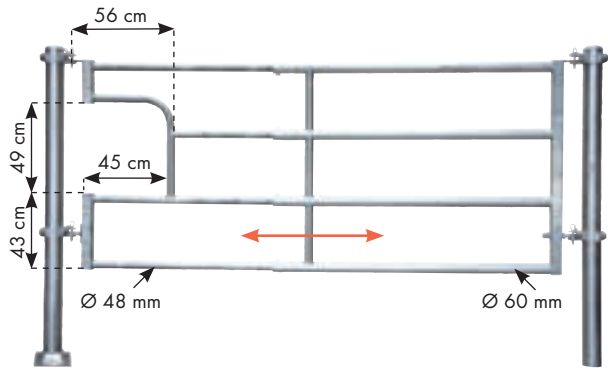


Divider Drinking Bowl R4 (1/2)	323320	56 kg
Divider Drinking Bowl R4 (2/3)	323321	63 kg
Divider Drinking Bowl R4 (3/4)	323322	77 kg
Divider Drinking Bowl R4 (4/5)	323323	95 kg
Divider Drinking Bowl R4 (5/6)	323324	112 kg

	R4 (1/2)	R4 (2/3)	R4 (3/4)	R4 (4/5)	R4 (5/6)
Nominal length:	190 - 290 cm	240 - 345 cm	340 - 445 cm	440 - 545 cm	540 - 625 cm
Mounted length:	170 - 270 cm	220 - 325 cm	320 - 425 cm	420 - 525 cm	520 - 605 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	211 cm	211 cm	211 cm	211 cm	211 cm

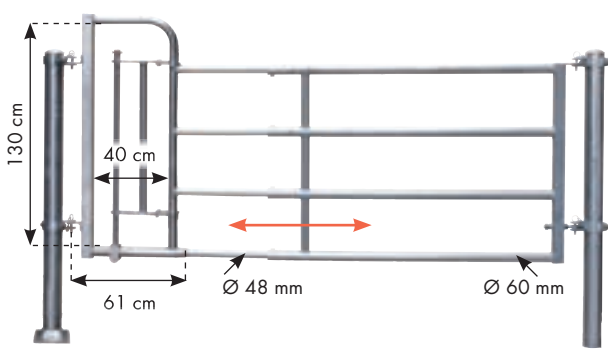

Divider Man Escape R4 (1/2)	323520	70 kg
Divider Man Escape R4 (2/3)	323521	76 kg
Divider Man Escape R4 (3/4)	323522	90 kg
Divider Man Escape R4 (4/5)	323523	108 kg
Divider Man Escape R4 (5/6)	323524	125 kg

	R4 (1/2)	R4 (2/3)	R4 (3/4)	R4 (4/5)	R4 (5/6)
Nominal length:	195 - 270 cm	245 - 345 cm	345 - 445 cm	445 - 545 cm	545 - 625 cm
Mounted length:	175 - 250 cm	225 - 325 cm	325 - 425 cm	425 - 525 cm	525 - 605 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	186 cm	186 cm	186 cm	186 cm	186 cm

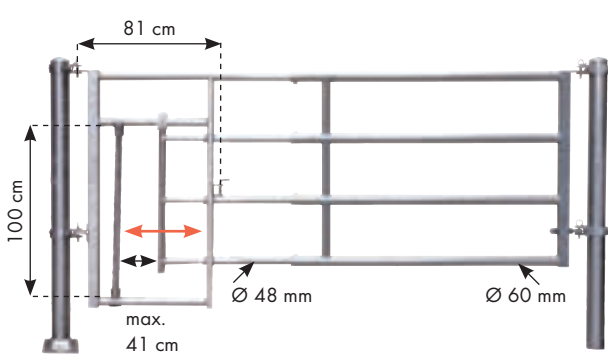

Divider Calf Creep R4 (1/2)	323420	66 kg
Divider Calf Creep R4 (2/3)	323421	77 kg
Divider Calf Creep R4 (3/4)	323422	95 kg
Divider Calf Creep R4 (4/5)	323423	104 kg
Divider Calf Creep R4 (5/6)	323424	121 kg

	R4 (1/2)	R4 (2/3)	R4 (3/4)	R4 (4/5)	R4 (5/6)
Nominal length:	215 - 295 cm	265 - 365 cm	365 - 465 cm	465 - 565 cm	565 - 625 cm
Mounted length:	195 - 275 cm	245 - 345 cm	345 - 445 cm	445 - 545 cm	545 - 605 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	212 cm	212 cm	212 cm	212 cm	212 cm

Please order posts and assembly accessories separately






Type Ref. Weight Description


Divider Water Trough R5 (1/2)	323250	64 kg
Divider Water Trough R5 (2/3)	323251	74 kg
Divider Water Trough R5 (3/4)	323252	92 kg
Divider Water Trough R5 (4/5)	323253	117 kg
Divider Water Trough R5 (5/6)	323254	132 kg

	R5 (1/2)	R5 (2/3)	R5 (3/4)	R5 (4/5)	R5 (5/6)
Nominal length:	205 - 295 cm	255 - 355 cm	355 - 455 cm	455 - 555 cm	555 - 625 cm
Mounted length:	185 - 275 cm	235 - 335 cm	335 - 435 cm	435 - 535 cm	535 - 605 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	211 cm	211 cm	211 cm	211 cm	211 cm

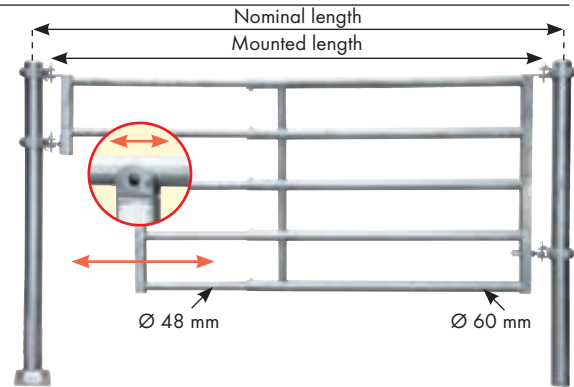


Divider Drinking Bowl R5 (1/2)	323350	65 kg
Divider Drinking Bowl R5 (2/3)	323351	74 kg
Divider Drinking Bowl R5 (3/4)	323352	92 kg
Divider Drinking Bowl R5 (4/5)	323353	117 kg
Divider Drinking Bowl R5 (5/6)	323354	133 kg

	R5 (1/2)	R5 (2/3)	R5 (3/4)	R5 (4/5)	R5 (5/6)
Nominal length:	190 - 290 cm	240 - 345 cm	340 - 445 cm	440 - 545 cm	540 - 625 cm
Mounted length:	170 - 270 cm	220 - 325 cm	320 - 425 cm	420 - 525 cm	520 - 605 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	211 cm	211 cm	211 cm	211 cm	211 cm

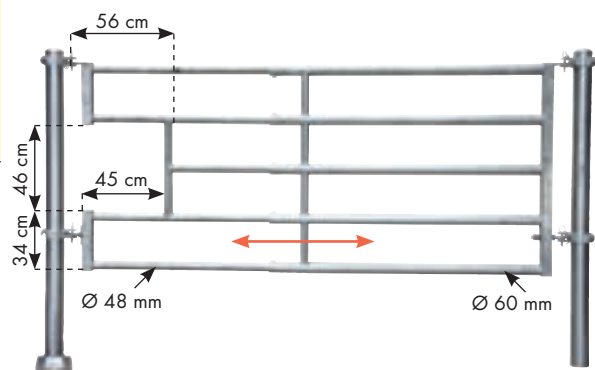


Divider Man Escape R5 (1/2)	323550	74 kg
Divider Man Escape R5 (2/3)	323551	83 kg
Divider Man Escape R5 (3/4)	323552	101 kg
Divider Man Escape R5 (4/5)	323553	126 kg
Divider Man Escape R5 (5/6)	323554	142 kg

	R5 (1/2)	R5 (2/3)	R5 (3/4)	R5 (4/5)	R5 (5/6)
Nominal length:	195 - 270 cm	245 - 345 cm	345 - 445 cm	445 - 545 cm	545 - 625 cm
Mounted length:	175 - 250 cm	225 - 325 cm	325 - 425 cm	425 - 525 cm	525 - 605 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	186 cm	186 cm	186 cm	186 cm	186 cm

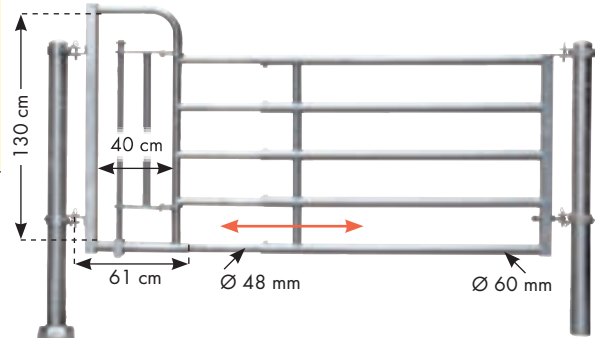


Divider Calf Creep R5 (1/2)	323450	78 kg
Divider Calf Creep R5 (2/3)	323451	88 kg
Divider Calf Creep R5 (3/4)	323452	106 kg
Divider Calf Creep R5 (4/5)	323453	131 kg
Divider Calf Creep R5 (5/6)	323454	146 kg

	R5 (1/2)	R5 (2/3)	R5 (3/4)	R5 (4/5)	R5 (5/6)
Nominal length:	215 - 295 cm	265 - 365 cm	365 - 465 cm	465 - 565 cm	565 - 625 cm
Mounted length:	195 - 275 cm	245 - 345 cm	345 - 445 cm	445 - 545 cm	545 - 605 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	212 cm	212 cm	212 cm	212 cm	212 cm

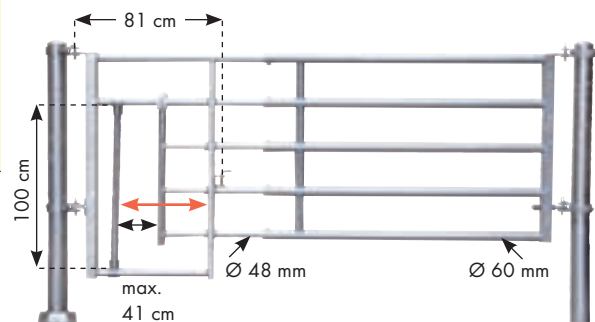

Please order posts and assembly accessories separately




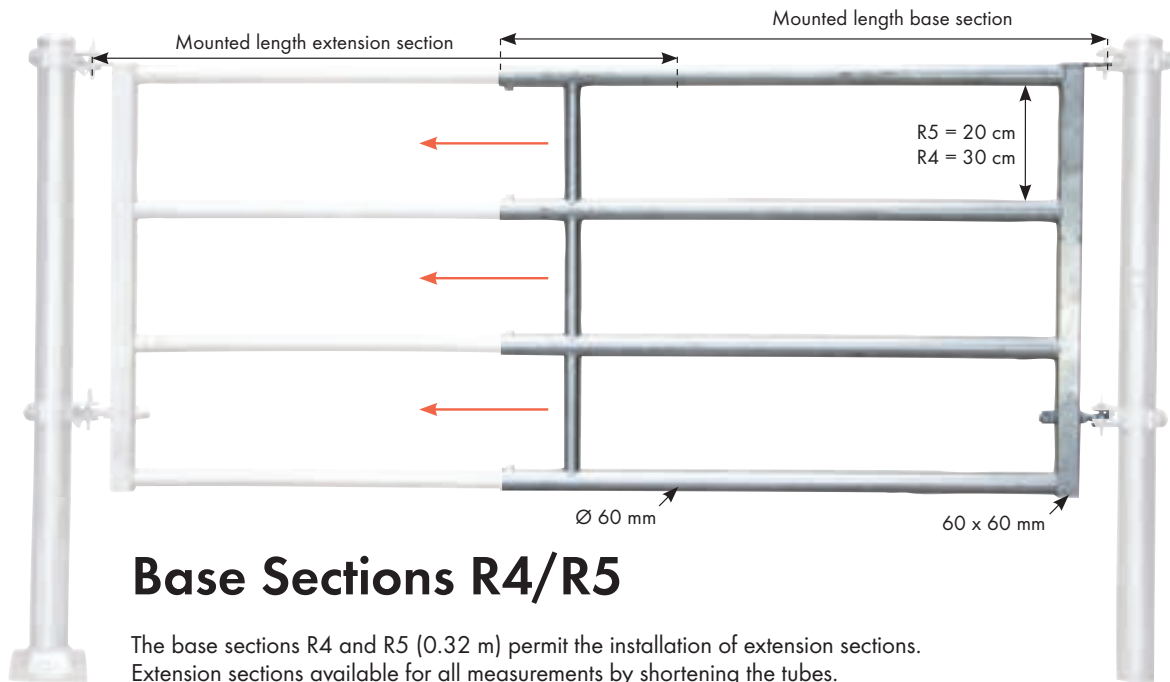

Base Sections R4/R5

The base sections R4 and R5 (0.32 m) permit the installation of extension sections. Extension sections available for all measurements by shortening the tubes.

Description **Type** **Ref.** **Weight**

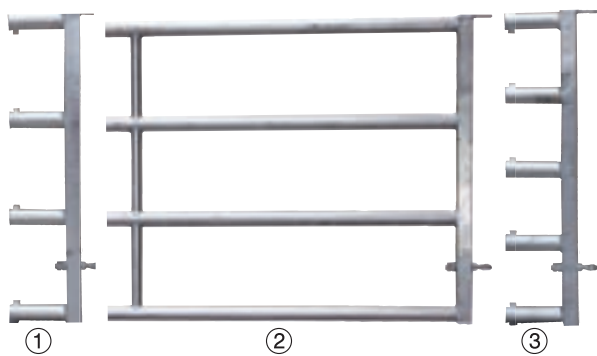

① Base Section R4 0.32 m	323028	9 kg
Base Section R4 1.11 m (1/2)	323040	26 kg
② Base Section R4 1.61 m (2/3)	323041	32 kg
Base Section R4 2.61 m (3/4)	323042	46 kg
Base Section R4 3.61 m (4/5)	323043	64 kg
Base Section R4 4.61 m (5/6)	323044	81 kg
Base Section R4 5.61 m (6/7)	323026	103 kg
③ Base Section R5 0.32 m	323158	9 kg
Base Section R5 1.11 m (1/2)	323160	30 kg
Base Section R5 1.61 m (2/3)	323161	39 kg
Base Section R5 2.61 m (3/4)	323162	57 kg
Base Section R5 3.61 m (4/5)	323163	82 kg
Base Section R5 4.61 m (5/6)	323164	98 kg
Base Section R5 5.61 m (6/7)	323165	114 kg

! Length specification = Mounted length




Base Section 2-way R4, 1.50 m	323230	29 kg
Base Section 2-way R4, 2.50 m	323231	45 kg
Base Section 2-way R4, 3.50 m with central brace	323232	63 kg




Divider Base Section 2-way R5, 1.50 m	323177	35 kg
Divider Base Section 2-way R5, 2.50 m	323175	51 kg
Divider Base Section 2-way R5, 3.50 m with central brace	323176	74 kg

! With the base section 2-way R4/R5 a combination of two different extension sections can be used.

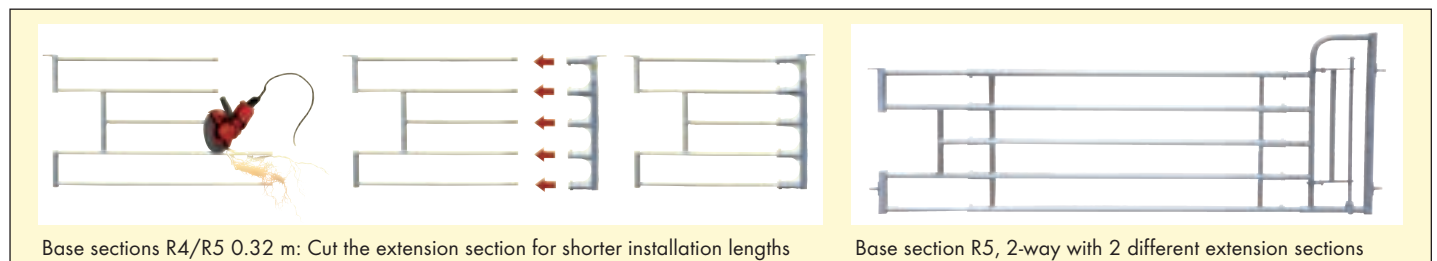

Base sections R4/R5 0.32 m: Cut the extension section for shorter installation lengths

Base section R5, 2-way with 2 different extension sections

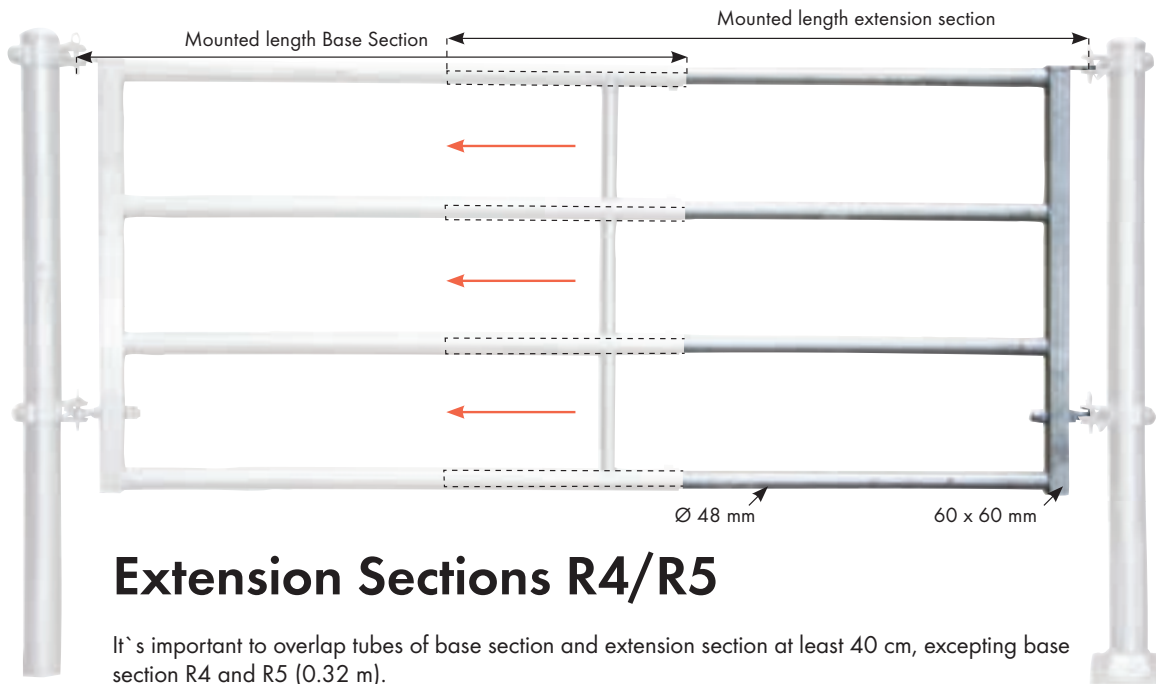

Extension Sections R4/R5

It's important to overlap tubes of base section and extension section at least 40 cm, excepting base section R4 and R5 (0.32 m).

①	Extension Section R4 Divider 1.11 m	323036	22 kg
①	Extension Section R4 Divider 1.86 m	323029	28 kg
①	Extension Section R4 Divider 2.61 m	323047	39 kg
②	Extension Section R4 Gate 1.05 m	323037	23 kg
②	Extension Section R4 Gate 1.80 m	323039	30 kg
②	Extension Section R4 Gate 2.55 m	323046	40 kg
③	Extension Section R4 Man Escape 1.86 m	323045	40 kg
④	Extension Section R4 Water Trough 2.11 m	323048	32 kg
⑤	Extension Section R4 Drinking Bowl 2.11 m	323049	31 kg
⑥	Extension Section R4 Calf Creep 2.12 m	323078	44 kg
⑦	Extension Section Gate RS4 with spring bolt, 1.08 m	323017	23 kg
⑦	Extension Section Gate RS4 with spring bolt, 1.80 m	323038	27 kg
⑧	Extension Section R5 Divider 1.11 m	323157	22 kg
⑧	Extension Section R5 Divider 1.86 m	323057	33 kg
⑧	Extension Section R5 Divider 2.61 m	323066	44 kg
⑨	Extension Section R5 Gate 1.05 m	323180	22 kg
⑨	Extension Section R5 Gate 1.80 m	323056	38 kg
⑨	Extension Section R5 Gate 2.55 m	323065	39 kg
⑩	Extension Section R5 Man Escape 1.86 m	323055	44 kg
⑪	Extension Section R5 Water Trough 2.11 m	323067	35 kg
⑫	Extension Section R5 Drinking Bowl 2.11 m	323068	35 kg
⑬	Extension Section R5 Calf Creep 2.12 m	323069	49 kg
⑭	Extension Section Gate RS5 with spring bolt, 1.08 m	323097	22 kg
⑭	Extension Section Gate RS5 with spring bolt, 1.80 m	323079	32 kg
	Quick-Lock RS	304104	1.2 kg



Length specification = Mounted length

For Pos. 7 + 14
please order
2x Ref. 304104
separately

Man Escape



- ③ 4 Bars
- ⑩ 5 Bars

Trough




- ④ 4 Bars
- ⑪ 5 Bars

Divider



- ① 4 Bars
- ⑧ 5 Bars

Gate R



- ② 4 Bars
- ⑨ 5 Bars

Gate RS



- ⑦ 4 Bars
- ⑭ 5 Bars

Calf creep




- ⑥ 4 Bars
- ⑬ 5 Bars

Drinking bowl



- ⑤ 4 Bars
- ⑫ 5 Bars


Dividers V

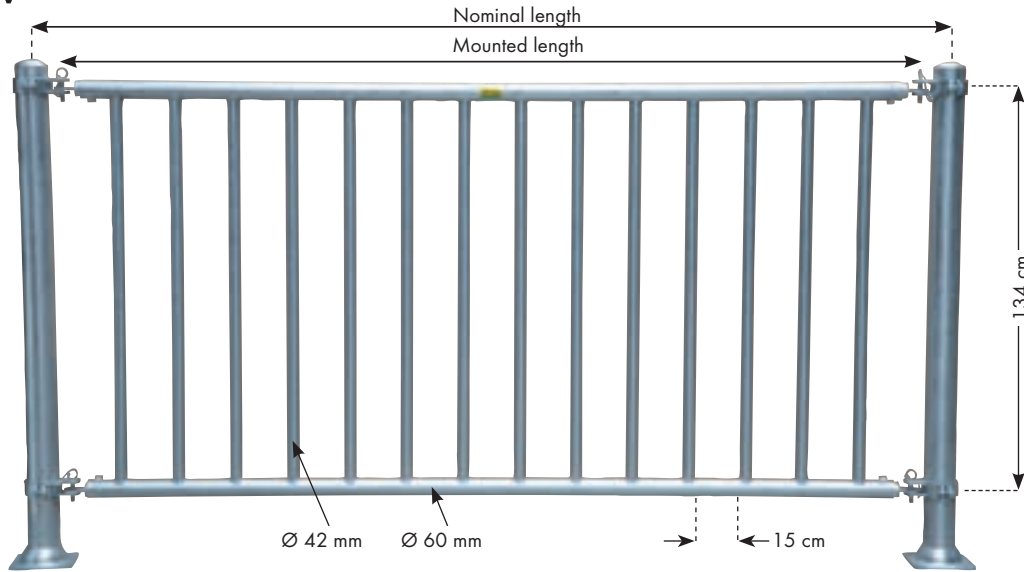

Please order telescoping brackets, posts and assembly accessories separately!

Description Type Ref. Weight

10 Installation Variants:

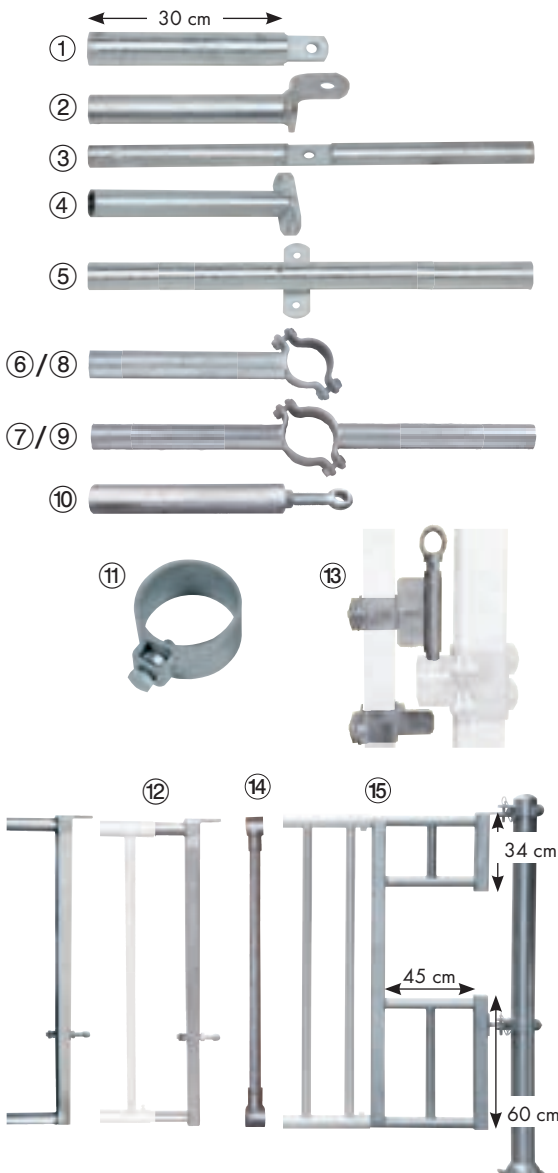

Divider V 2.00 m With vertical tubes	323652	44 kg
Divider V 3.00 m With vertical tubes	323653	67 kg
Divider V 4.00 m With vertical tubes	323654	97 kg


	2.00 m	3.00 m	4.00 m
Nominal length:	200 - 219 cm	300 cm	400 cm
Frame length:	172 cm	272 cm	372 cm
Mounted length:	181 - 200 cm	281 - 300 cm	381 - 400 cm

- Reliable, heavy-duty execution
- For beef cattle
- Vertical bars prevent from climbing up
- Length can be reduced, clamp ring d = 70 mm necessary and a hole for the clamp screw has to be drilled

① Telescoping Bracket Standard	334408	1.4 kg
② Telescoping Bracket Angled	334410	1.4 kg
③ Telescoping Bracket Standard 2-Way	334409	2.3 kg
④ Telescoping Bracket Compact 1-Way (Wall mounting support tubes)	334406	1.3 kg
⑤ Telescoping Bracket Compact 2-Way	334407	2.8 kg
⑥ Telescoping Bracket Clamp 102 1-Way	334422	3.0 kg
⑦ Telescoping Bracket Clamp 102 2-Way	334423	4.0 kg
⑧ Telescoping Bracket Clamp 76 1-Way	334420	2.4 kg
⑨ Telescoping Bracket Clamp 76 2-Way	334421	3.2 kg
⑩ Telescoping Bracket with Eye Bolt	334411	2.2 kg

⑪ Clamp Ring d = 70 mm For support tube with set-screw	8699001	
⑫ End Bar with Hinge Plates and Eye Bolt for dividers V	323659	9.0 kg
⑬ Quick-Lock TS for dividers R (Incl. clamps)	304108	3.7 kg
⑭ Intermediate Bar for divider V	323658	5,0 kg
⑮ Extension Section for divider V drinking bowl extends the divider by 70 cm	323656	22 kg

Calf Dividers

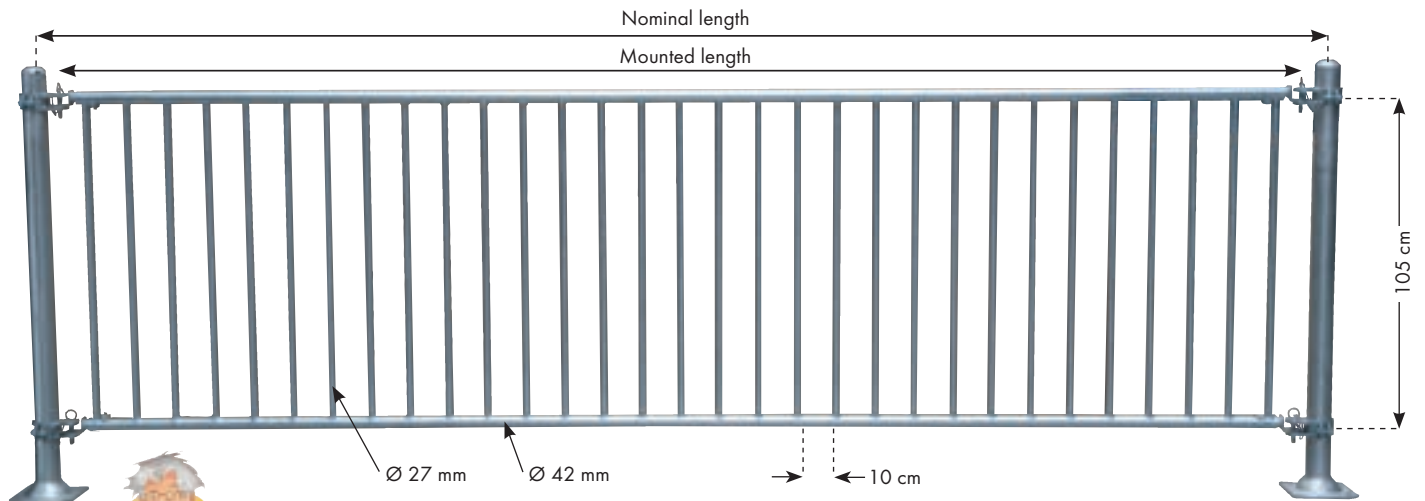

Please order telescoping brackets, posts and assembly accessories separately!

Barn and Stable Equipment - Dividers, Gates


Type	Ref.	Weight	Description
Divider for calves 2.50 m With vertical tubes	322060	33 kg	5 installation variants:
Divider for calves 3.00 m With vertical tubes	322061	40 kg	
Divider for calves 4.00 m With vertical tubes	322062	54 kg	
Divider for calves 5.00 m With vertical tubes	322063	68 kg	

	2,50 m	3,00 m	4,00 m	5,00 m
Nominal length:	250 - 270 cm	300 - 320 cm	400 - 420 cm	500 - 520 cm
Frame length:	230 cm	280 cm	380 cm	480 cm
Mounted length:	240 - 250 cm	290 - 300 cm	390 - 400 cm	490 - 500 cm

- For calves up to 6 months
- Improved safety
- Narrower tube spacing
- Length can be reduced, clamp ring d = 51 mm necessary and a hole for the clamp screw has to be drilled

① Telescoping Bracket Calf Standard 1-Way	322050	
② Telescoping Bracket Calf Compact	322051	
③ Telescoping Bracket Calf Clamp 76	322052	1.6 kg
④ Telescoping Bracket Calf Clamp 76 2-Way	322053	2.1 kg
⑤ Telescoping Bracket Calf Standard 2-Way	322054	1.5 kg


⑥ Clamp Ring d = 51 mm For support tube with set-screw	890001	
⑦ End Bar 45 x 45 For calf dividers, for quick-lock TS and mounting bracket	322055	5.0 kg
⑧ Quick-Lock TS for light dividers (Incl. clamps)	304107	3.6 kg
⑨ Intermediate Bar for calf divider	322065	1.8 kg
⑩ Extension Section Bowl for calf dividers extends the divider by 70 cm	322064	12 kg

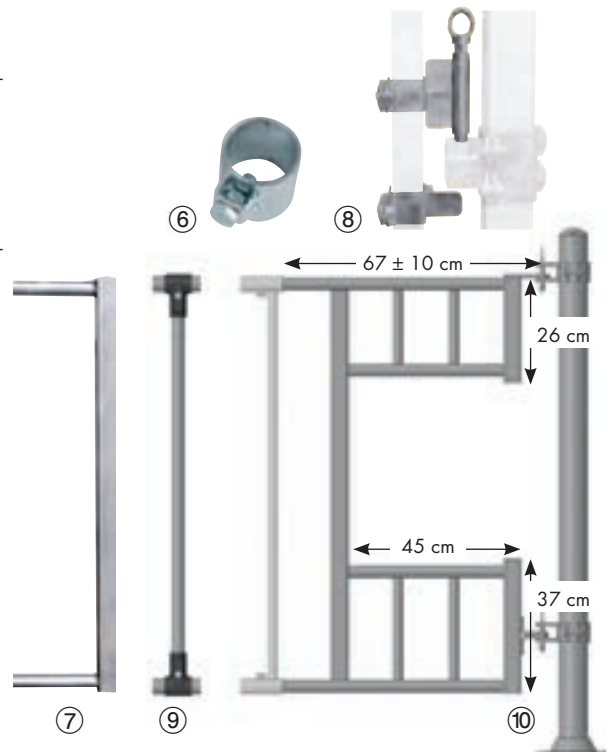




The size of the group can be adjusted quickly by using the divider R2LB

Dividers R2LB

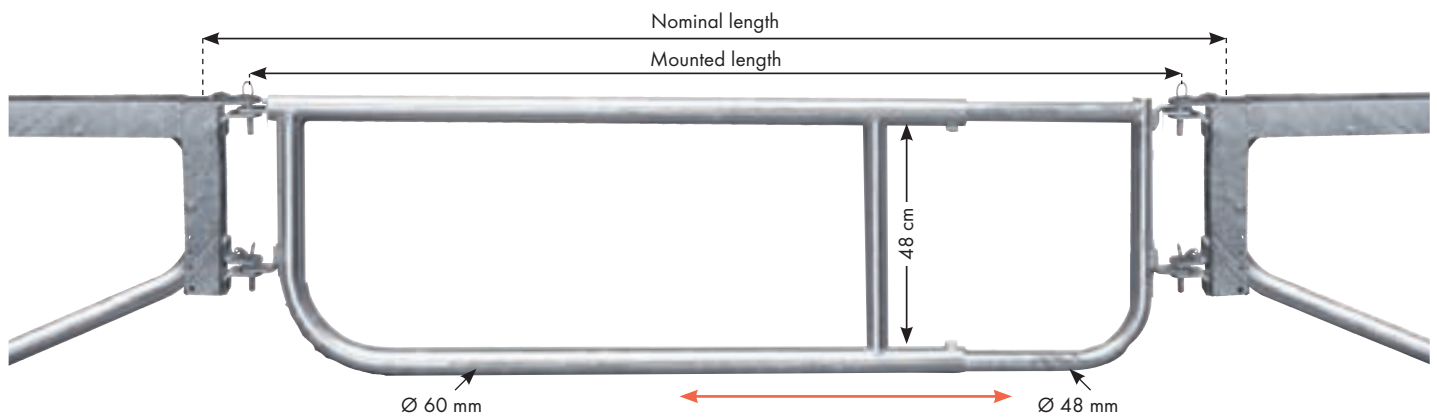

Description	Type	Ref.	Weight
	Divider R2LB (1/2)	304260	19 kg
	Divider R2LB (2/3)	304261	25 kg
	Divider R2LB (3/4)	304262	33 kg
	Divider R2LB (4/5)	304263	42 kg

	R2LB (1/2)	R2LB (2/3)	R2LB (3/4)	R2LB (4/5)
Nominal length:	160 - 210 cm	210 - 300 cm	295 - 400 cm	395 - 500 cm
Mounted length:	140 - 190 cm	190 - 280 cm	275 - 380 cm	375 - 480 cm
Mounted length divider base section:	115 cm	155 cm	255 cm	355 cm
Mounted length divider extension section:	108 cm	168 cm	168 cm	168 cm




Mounting Frame For mounting of dividers R2LB to cubicle dividers of 60 mm tubing	334660	7 kg
--	---------------	------



Please order posts and assembly accessories separately


Type	Ref.	Weight
Light Divider (90/120)	323075	18 kg
Light Divider (140/170)	323076	24 kg
Light Divider (2/3)	323070	37 kg
Light Divider (3/4)	323071	49 kg
Light Divider (4/5)	323072	61 kg
Light Divider (5/6)	323073	70 kg

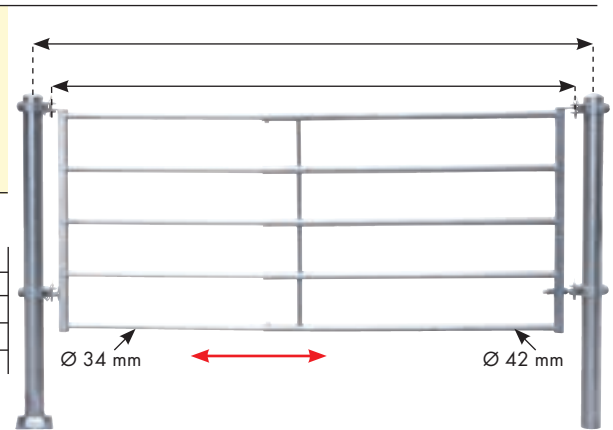

	90/120	140/170	2/3	3/4	4/5	5/6
Nominal length:	90 - 120 cm	140 - 170 cm	190 - 300 cm	290 - 400 cm	390 - 500 cm	490 - 600 cm
Mounted length:	70 - 100 cm	120 - 150 cm	170 - 280 cm	270 - 380 cm	370 - 480 cm	470 - 580 cm
Mounted length divider base section:	57 cm	107 cm	160 cm	260 cm	360 cm	460 cm
Mounted length divider extension section:	57 cm	57 cm	156 cm	156 cm	156 cm	156 cm


- Light divider for calves or young stock
- Consisting of base section and extension section, height 1.15 m
- Eye bolt in lower section of the base frame for easy adjustment (not for Ref. 323075 and 323076)
- 5 cross bars Ø 42.4 x 2.4 mm/33.7 x 2.5 mm
- When the lock (ref. 323090) or the quick-lock TS for light dividers (ref. 304107) is attached, it can be used as a gate

Light Divider Drinking Bowl (2/3)	323370	38 kg
Light Divider Drinking Bowl (3/4)	323371	48 kg
Light Divider Drinking Bowl (4/5)	323372	61 kg
Light Divider Drinking Bowl (5/6)	323373	69 kg

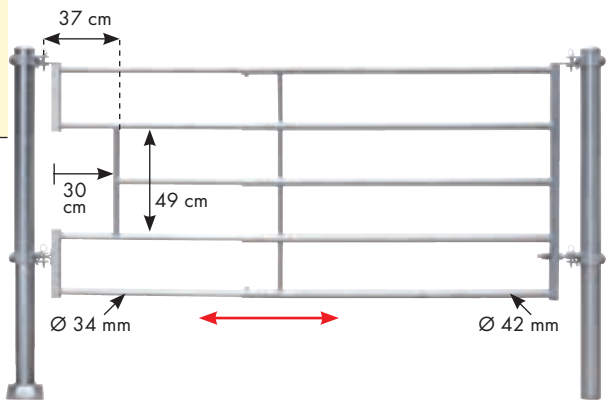

	2/3	3/4	4/5	5/6
Nominal length:	220 - 320 cm	320 - 420 cm	430 - 520 cm	520 - 620 cm
Mounted length:	200 - 280 cm	300 - 380 cm	400 - 480 cm	500 - 580 cm
Mounted length divider base section:	160 cm	260 cm	360 cm	460 cm
Mounted length divider extension section:	156 cm	156 cm	156 cm	156 cm


Light Base Section 0.57 m (90/120)	323091	9.5 kg
Light Base Section 1.07 m (140/170)	323093	15 kg
Light Base Section 1.60 m (2/3)	323085	20.5 kg
Light Base Section 2.60 m (3/4)	323086	31 kg
Light Base Section 3.60 m (4/5)	323087	43.5 kg
Light Extension Section Bowl 1.56 m	304120	17 kg
Light Extension Section Gate 1.52 m	304130	18.5 kg
Light Extension Section 1.56 m	304131	17 kg

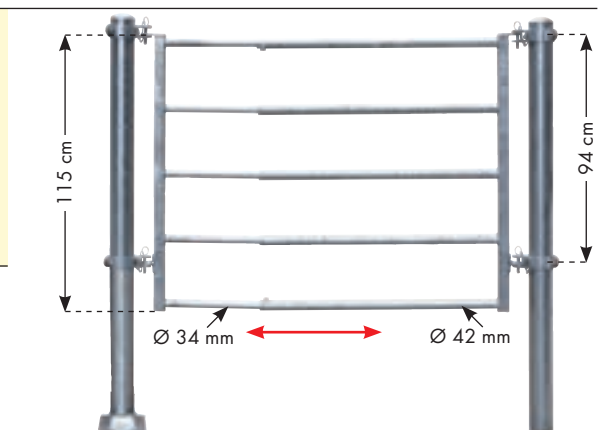

- Base section: 5 cross tubes with Ø 42.4 x 2.4 mm / Extension section: 5 cross tubes with Ø 33.7 x 2.5 mm
- Eye bolt in lower section of the base frame for easy adjustment (not for Ref. 323091 and 323093)

! Please order base section and extension section separately
Please order posts and assembly accessories separately


- | | | |
|---|--------|--------|
| ① Attachable Lock
To utilize the light dividers
90/120 and 140/170 as gates | 323090 | 2.5 kg |
| ② Quick-Lock TS
for light dividers
(Incl. clamps) | 304107 | 3.6 kg |

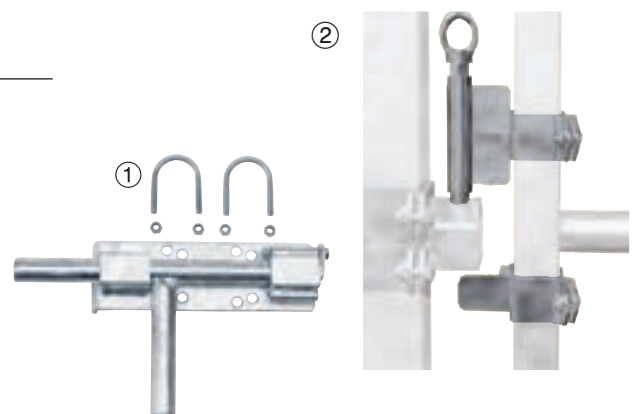

Light Divider, with plastic sheet covering, for calves



The new light divider with plastic sheet covering is a combination of the well-known light divider and an 8 mm thick plastic plate with smooth surface. This divider was developed under the aspect of reduced germ transmission in stables with several group pens. The plastic plates can be mounted quickly and easily on the divider with the help of the mounting kit. Due to the easy length adjustment, the dividers can be adapted to different installation situations.

The plastic plates are pre-drilled and have a height of 1.20 m and can be ordered in 1.5 m and 2.0 m lengths. If the dimensions differ, the plastic plate can be adjusted with a circular saw. Eye bolt in the bottom of the base section for easy adjustment (not for Ref. 323275 and 323276)

Description	Type	Ref.	Weight
	Light Divider with plastic sheet covering (90/120)	323275	37 kg
	Light Divider with plastic sheet covering (140/170)	323276	48 kg
	Light Divider with plastic sheet covering (2/3)	323270	74 kg
	Light Divider with plastic sheet covering (3/4)	323271	97 kg
	Light Divider with plastic sheet covering (4/5)	323272	122 kg
	Light Divider with plastic sheet covering (5/6)	323273	141 kg

Plastic Sheet 1.5 m	323279	9.4 kg
Plastic Sheet 2.0 m	323278	12.5 kg
Mounting Kit for Light Divider with sheet covering	323280	2.2 kg

	90/120	140/170	2/3	3/4	4/5	5/6
Nominal length:	90 - 120 cm	140 - 170 cm	190 - 300 cm	290 - 400 cm	390 - 500 cm	490 - 600 cm
Mounted length:	70 - 100 cm	120 - 150 cm	170 - 280 cm	270 - 380 cm	370 - 480 cm	470 - 580 cm
Mounted length divider base section:	57 cm	107 cm	160 cm	260 cm	360 cm	460 cm
Mounted length divider extension section:	57 cm	57 cm	156 cm	156 cm	156 cm	156 cm

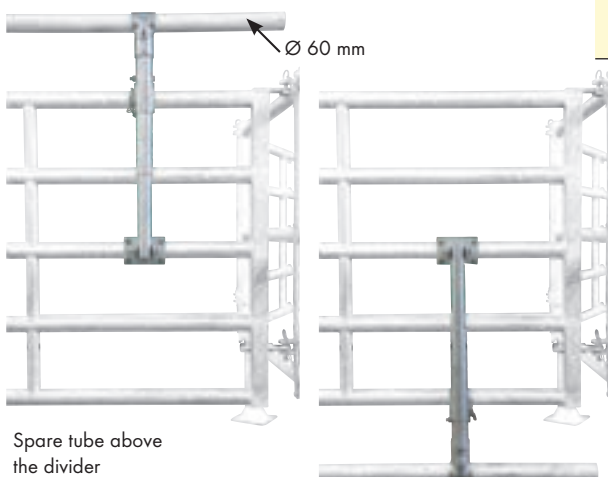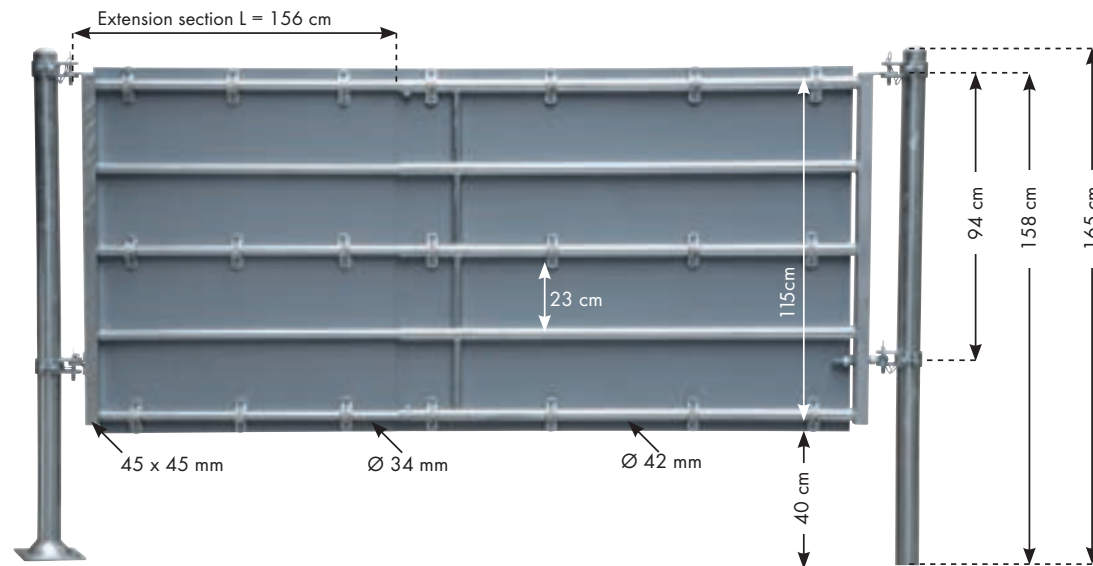

Spare tube above the divider


Spare tube below the divider





Mounting bracket for additional tube	323700	8.3 kg
1 piece, for dividers and gates		

! Assembly on base section and extension section of the gates and dividers R





Please order posts and assembly accessories separately

Type	Ref.	Weight	Description
① Headblock for thermal bowl drinker	321519	2,4 kg	 Always combine a telescoping bracket and a headblock tube. Covers space above drinkers and protects from animal jump ups.
② Headblock for thermopipe	321517	1,8 kg	

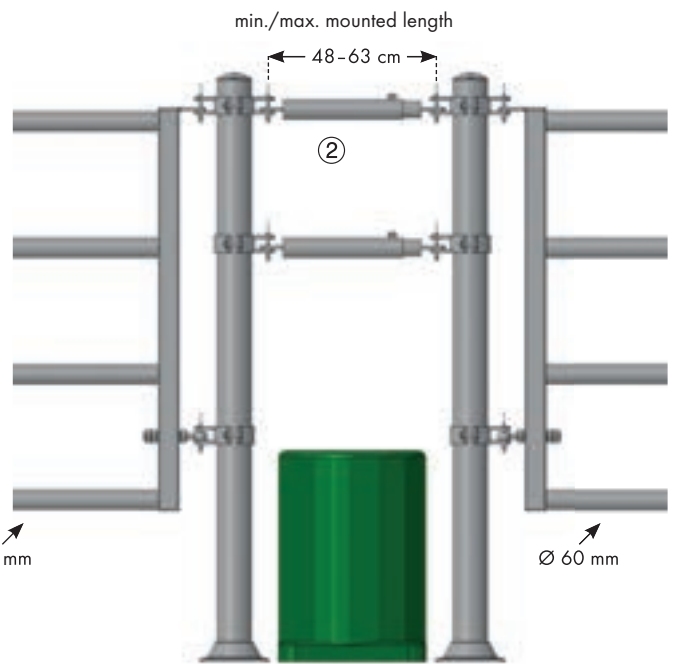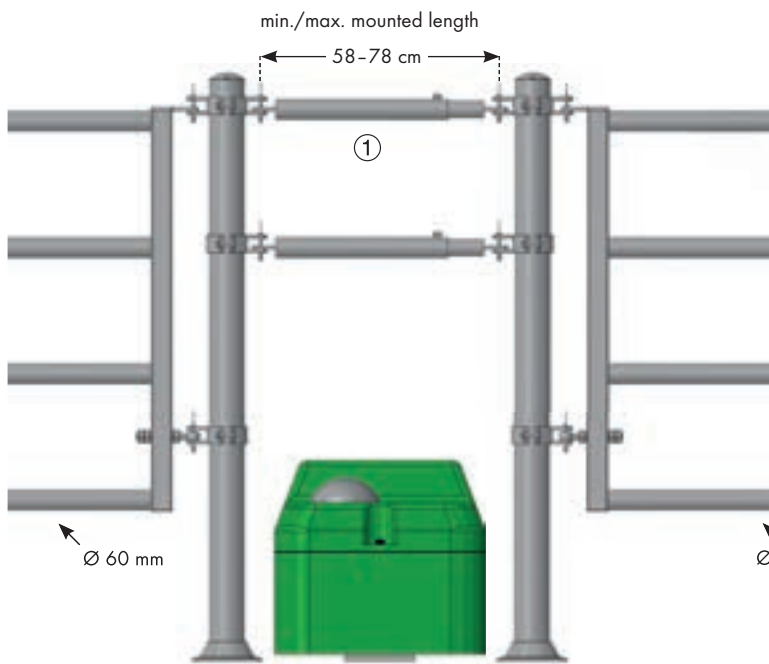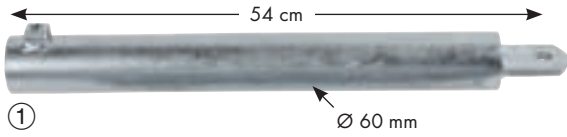


③ Telescoping Bracket Standard	334408	1.4 kg
④ Telescoping Bracket Compact 1-Way (Wall mounting support tubes)	334406	1.3 kg

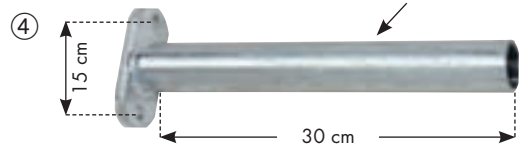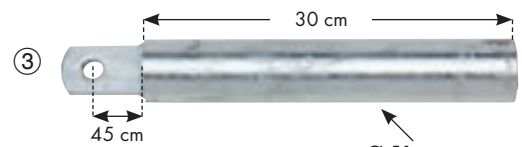

Please order telescoping brackets, posts and assembly accessories separately!

⑤ Gap Guard	303416	1.5 kg
-------------	--------	--------

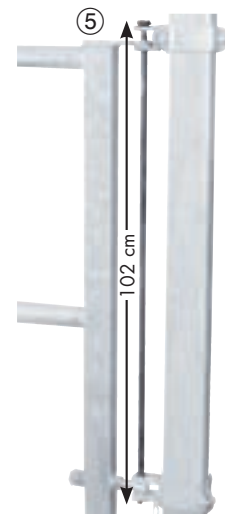

 • Suitable for dividers, gates and horse feed fronts

Gates for horses

Gates which are used at box stalls and paddocks for horses must not only guarantee safe locks and easy handling. These components of the stable equipment must also guarantee that there will be no risk of injury. The gates of the PATURA programme, recommended for application with horses, particularly fulfill these requirements.

Our recommendations:

	Gate R4	Gate R3	Gate RS4	Gate RS3	Gate TS3	Light Gate
Box stalls, individual	✓✓		✓✓		✓	
Paddocks	✓	✓✓	✓	✓✓	✓	
Turnout area		✓		✓✓	✓	
Foals						✓





For the safety of your horses

The guard rod reliably covers the gap between the divider and the post or wall (optional extra, ref. 303416)



Animal-friendly horse keeping with outdoor paddocks


Gates for cattle

For the work management in a free-stall barn it is a decisive factor to position functional gates at the appropriate passages. Besides the necessary stability a major focus is placed on easy opening and closing as well as protection against accidental opening by animals. PATURA offers 4 different models with altogether 8 designs of variable areas of application.


Our recommendations:	Gate R5	Gate R4	Gate R3	Gate RS5	Gate RS4	Gate RS3	Gate TS3	Light Gate
Dairy cows 		✓	✓✓		✓	✓✓	✓	
Suckler cow farming 	✓✓	✓		✓✓	✓			
Young stock 		✓✓			✓✓			✓
Calves up to 6 months 								✓
Beef bulls 	✓	✓✓		✓	✓✓			

 Please ask us for a detailed offer for your barns which can include on-site advice.


For all dividers and gates: Cut the extension section for shorter installation lengths

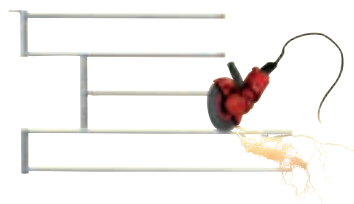


Stability and variability are our strengths



Heavy-duty mounting on sturdy 10 mm hinge plates with retaining bolt



Adjustable lower mounting using M22 eye bolt to compensate for angled mounting post



Tube-in-tube assembly with setscrew for easy length adjustment up to a metre




Gates R: lock protection with a self-locking flap trap



Gates RS: Easy opening and closing with quick-lock


Light Gates

- For calves, young stock and short fitting dimensions
- For heavy livestock with short installation dimensions

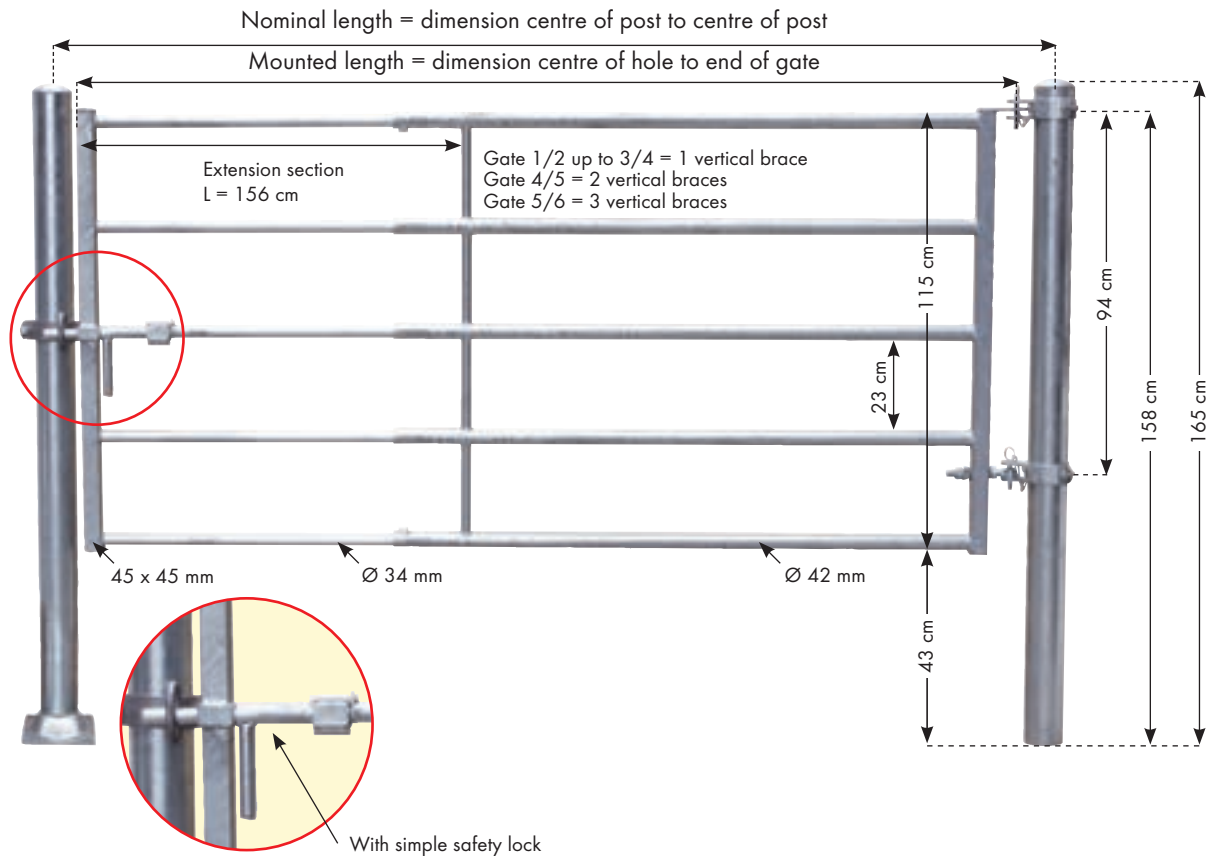


Gates TS

- Ideal for working alleys in dairy farming
- The length of the gate can be slightly adjusted with each opening and closing
- For application on passage ways of various width
- Base section 1 1/2" tubing (48.3 mm), extension section 38 mm tubing
- Easy opening and closing with quick-lock TS

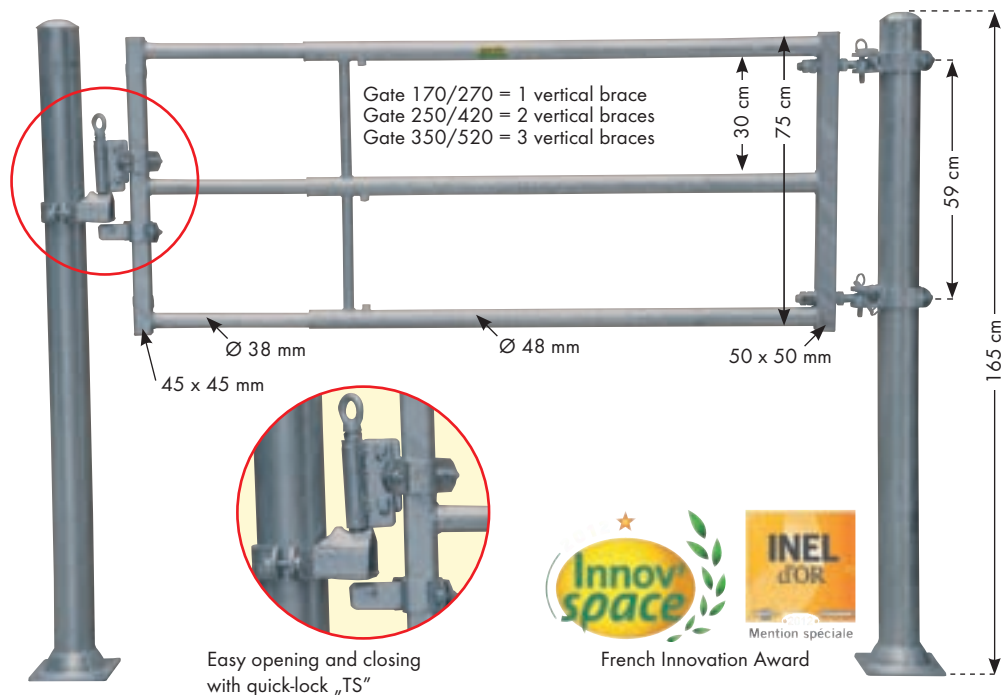


Gates R

- Tried and tested model with broad application
- Gate R5 (5 cross bars) and R4 (4 cross bars) with double lock for sliding, gate R3 (3 cross bars) with single lock
- Protection with self-locking flap trap (included) or safety bolt lock (accessory)
- Base section solid 2" tubing (60.3 mm), extension section 1 1/2" tubing (48.3 mm)

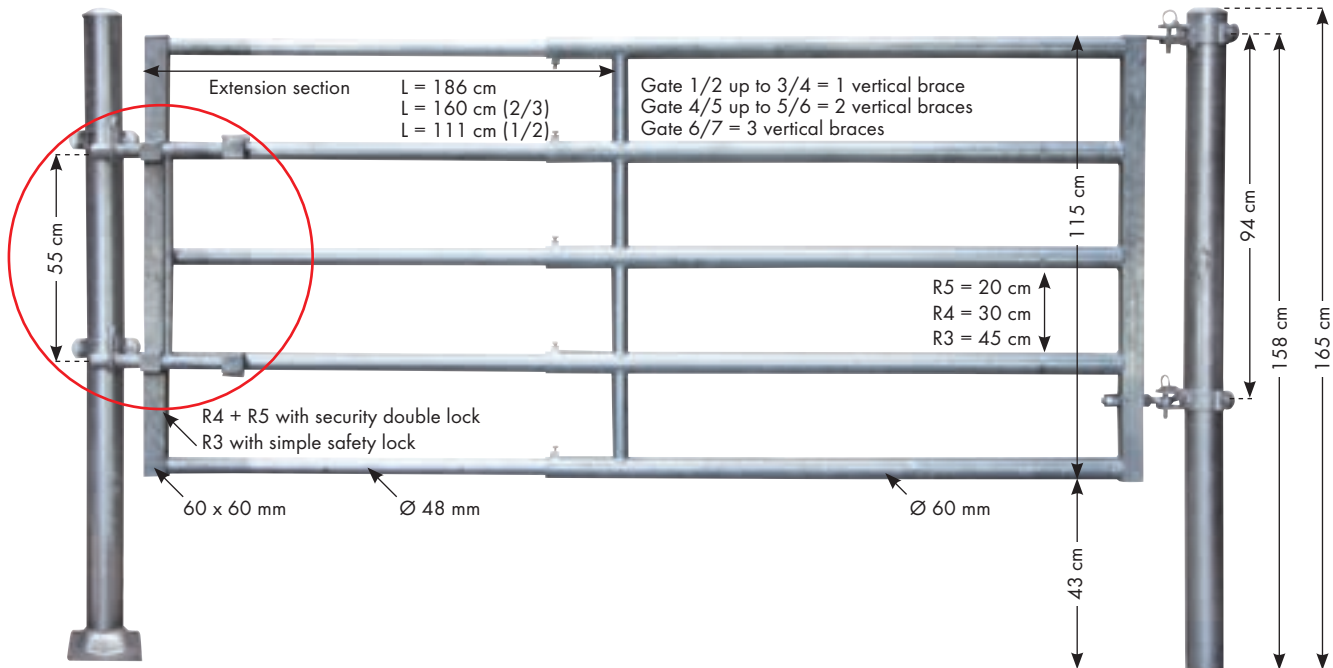

Gates RS

- Easy opening and closing with quick-lock "RS"
- Closing: the quick-lock automatically locks into the seating
- Opening: only pull the quick-lock, no safety latch to actuate
- Considerable time-savings when there are a lot of gates to open
- Safety: animals cannot open the quick-lock
- Basic structure and range of application as gate "R"
- Base section solid 2" tubing (60.3 mm), extension section 1 1/2" tubing (48.3 mm)

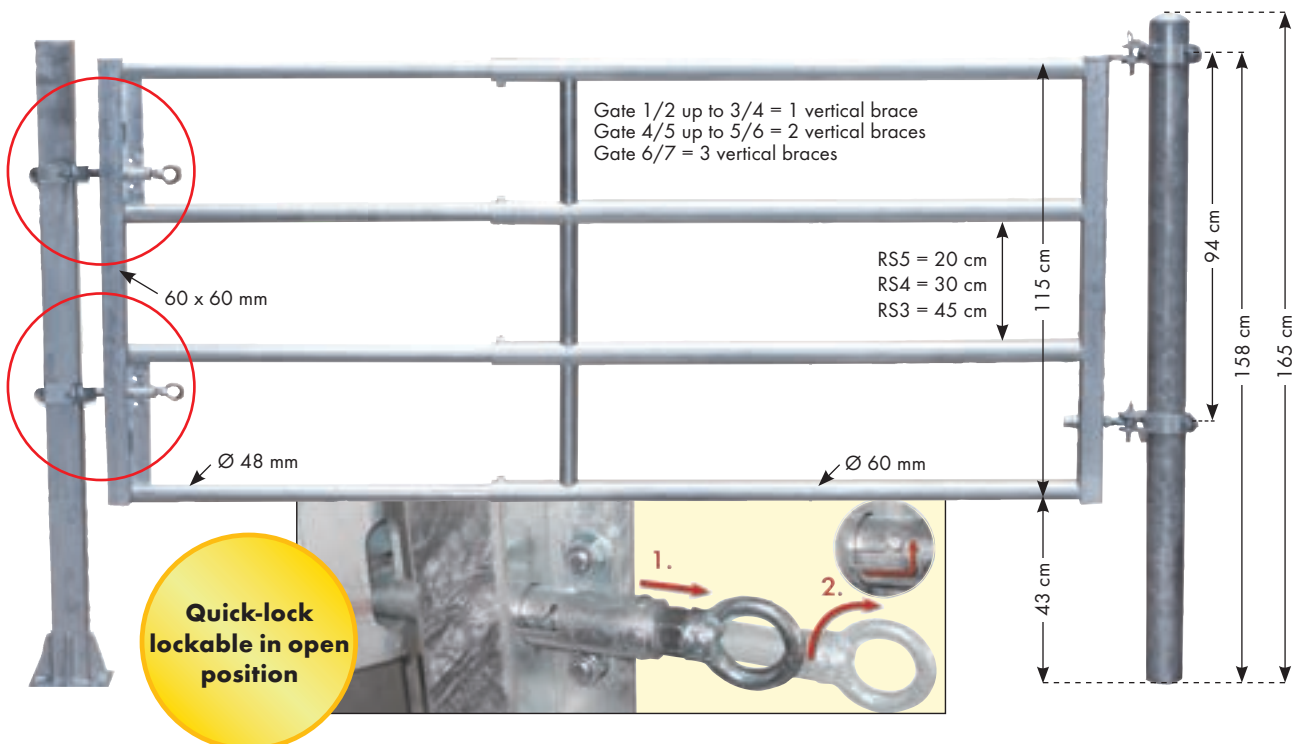


Description

Type


Ref.

Weight

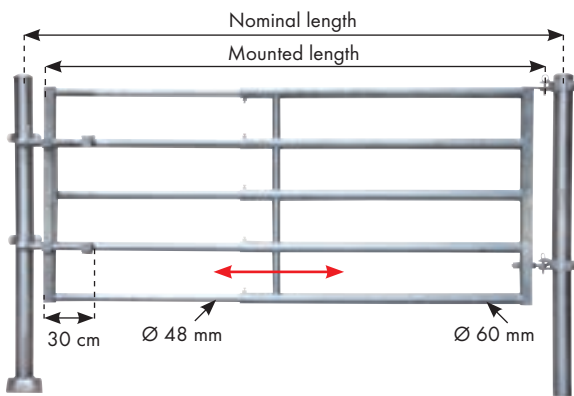


Gate R5 (1/2)	323060	53 kg
Gate R5 (2/3)	323061	74 kg
Gate R5 (3/4)	323062	93 kg
Gate R5 (4/5)	323063	115 kg
Gate R5 (5/6)	323064	134 kg
Gate R5 (6/7)	323059	156 kg

	R5 (1/2)	R5 (2/3)	R5 (3/4)	R5 (4/5)	R5 (5/6)	R5 (6/7)
Nominal length:	160 - 220 cm	220 - 310 cm	310 - 410 cm	410 - 510 cm	510 - 610 cm	610 - 710 cm
Mounted length:	140 - 200 cm	200 - 290 cm	290 - 390 cm	390 - 490 cm	490 - 590 cm	590 - 690 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm	561 cm
Mounted length divider extension section:	108 cm	156 cm	180 cm	180 cm	180 cm	180 cm

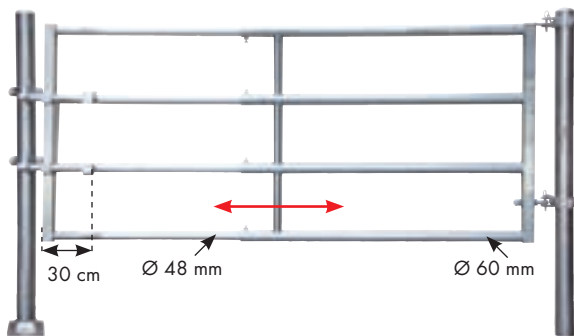


Gate R4 (1/2)	323030	47 kg
Gate R4 (2/3)	323031	62 kg
Gate R4 (3/4)	323032	78 kg
Gate R4 (4/5)	323033	96 kg
Gate R4 (5/6)	323034	112 kg
Gate R4 (6/7)	323035	134 kg

	R4 (1/2)	R4 (2/3)	R4 (3/4)	R4 (4/5)	R4 (5/6)	R4 (6/7)
Nominal length:	160 - 220 cm	220 - 310 cm	310 - 410 cm	410 - 510 cm	510 - 610 cm	610 - 710 cm
Mounted length:	140 - 200 cm	200 - 290 cm	290 - 390 cm	390 - 490 cm	490 - 590 cm	590 - 690 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm	561 cm
Mounted length divider extension section:	108 cm	156 cm	180 cm	180 cm	180 cm	180 cm

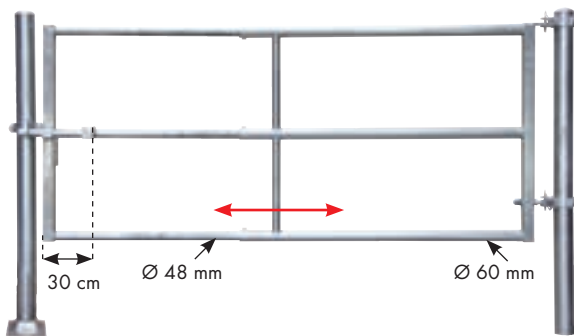

Gate R3 (1/2)	323010	38 kg
Gate R3 (2/3)	323011	49 kg
Gate R3 (3/4)	323012	61 kg
Gate R3 (4/5)	323013	76 kg
Gate R3 (5/6)	323014	89 kg

	R3 (1/2)	R3 (2/3)	R3 (3/4)	R3 (4/5)	R3 (5/6)
Nominal length:	160 - 220 cm	220 - 310 cm	310 - 410 cm	410 - 510 cm	510 - 610 cm
Mounted length:	140 - 200 cm	200 - 290 cm	290 - 390 cm	390 - 490 cm	490 - 590 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	108 cm	156 cm	180 cm	180 cm	180 cm

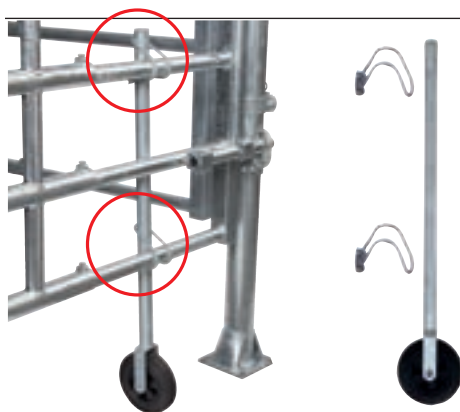

Support Wheel for stall gates	303451	4.6 kg
Height 115 cm Incl. assembly accessories		

Mounting Kit for base section	
Angled Cross-Over Clamp, 48 mm x 60 mm	341110
1 1/2" x 2"	




Please order posts and assembly accessories separately




Type Ref. Weight Description

Gate RS5 (1/2)	323130	54 kg
Gate RS5 (2/3)	323131	74 kg
Gate RS5 (3/4)	323132	93 kg
Gate RS5 (4/5)	323133	115 kg
Gate RS5 (5/6)	323134	47 kg

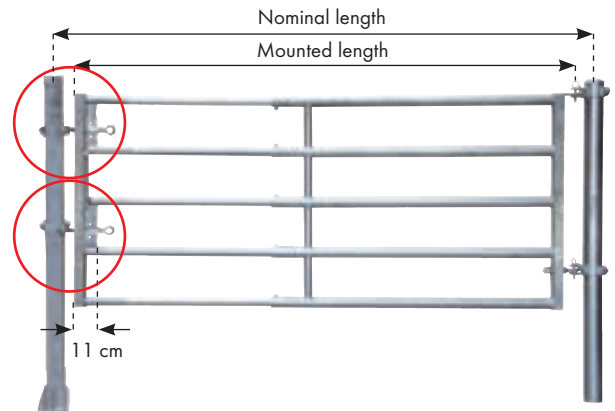


	RS5 (1/2)	RS5 (2/3)	RS5 (3/4)	RS5 (4/5)	RS5 (5/6)
Nominal length:	160 - 220 cm	220 - 310 cm	310 - 410 cm	410 - 510 cm	510 - 610 cm
Mounted length:	140 - 200 cm	200 - 290 cm	290 - 390 cm	390 - 490 cm	490 - 590 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	108 cm	156 cm	180 cm	180 cm	180 cm

Gate RS4 (1/2)	323120	53 kg
Gate RS4 (2/3)	323121	60 kg
Gate RS4 (3/4)	323122	72 kg
Gate RS4 (4/5)	323123	93 kg
Gate RS4 (5/6)	323124	106 kg

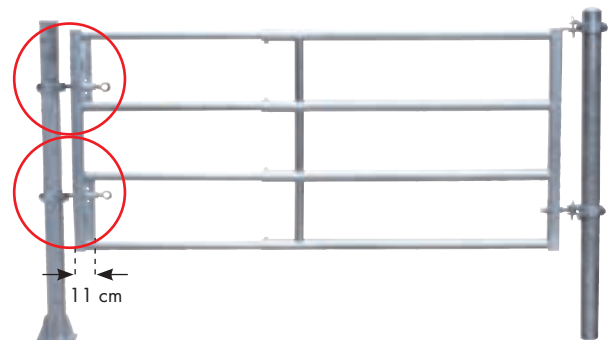

	RS4 (1/2)	RS4 (2/3)	RS4 (3/4)	RS4 (4/5)	RS4 (5/6)
Nominal length:	160 - 220 cm	195 - 295 cm	295 - 405 cm	395 - 505 cm	495 - 605 cm
Mounted length:	140 - 200 cm	200 - 290 cm	290 - 390 cm	390 - 490 cm	490 - 590 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	108 cm	156 cm	180 cm	180 cm	180 cm


Gate RS3 (1/2)	323110	37 kg
Gate RS3 (2/3)	323111	48 kg
Gate RS3 (3/4)	323112	61 kg
Gate RS3 (4/5)	323113	76 kg
Gate RS3 (5/6)	323114	87 kg

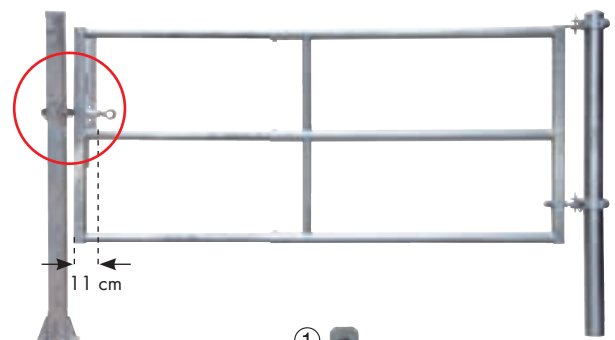

	RS3 (1/2)	RS3 (2/3)	RS3 (3/4)	RS3 (4/5)	RS3 (5/6)
Nominal length:	160 - 220 cm	195 - 295 cm	295 - 405 cm	395 - 505 cm	495 - 605 cm
Mounted length:	140 - 200 cm	200 - 290 cm	290 - 390 cm	390 - 490 cm	490 - 590 cm
Mounted length divider base section:	111 cm	161 cm	261 cm	361 cm	461 cm
Mounted length divider extension section:	108 cm	156 cm	180 cm	180 cm	180 cm

Attachable Quick-Lock:


① Quick-Lock RS horizontal	304104	1.2 kg
----------------------------	--------	--------



Easy opening and closing with quick-lock RS



- Closing: the quick-Lock automatically locks into the seating
- Opening: only pull the quick-lock, no safety latch to actuate
- Considerable time-savings when there are a lot of gates to open
- Safety: animals cannot open the quick-lock

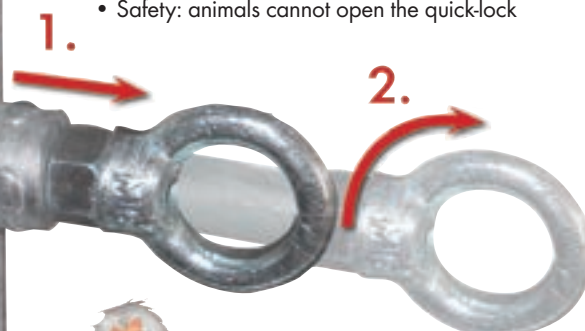

Quick-lock lockable in open position



Please order posts and assembly accessories separately




Description

Type

Ref.

Weight

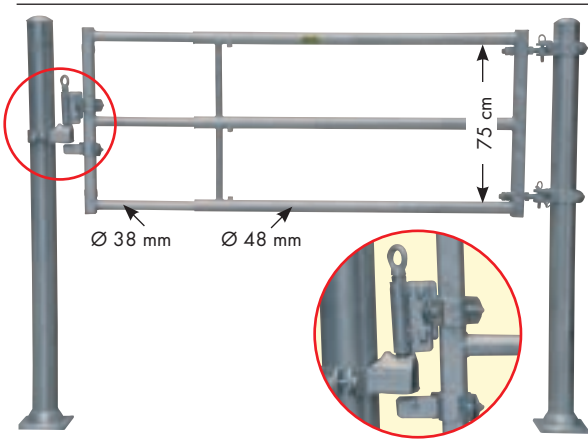


Gate TS3 (170/270)	323597	28 kg
Gate TS3 (250/420)	323598	40 kg
Gate TS3 (350/520)	323599	51 kg

	170/270	250/420	350/520
Nominal length:	170 - 270 cm	250 - 420 cm	350 - 520 cm
Mounted length:	150 - 250 cm	230 - 400 cm	330 - 500 cm
Mounted length divider base section:	140 cm	220 cm	320 cm
Mounted length divider extension section:	135 cm	215 cm	265 cm

- The length of the gate can be slightly adjusted with each opening and closing
- For application on passage ways of various width
- Easy opening and closing with quick-lock TS



French Innovation Award

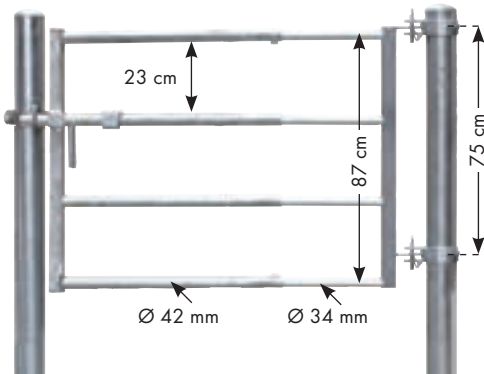

Gate, small	323084	14 kg
Mounted length 67 - 100 cm		



Suitable height for installation together with calf feed fronts




Please order posts and assembly accessories separately

Light Gate (2/3)	323080	37 kg
Light Gate (3/4)	323081	47 kg
Light Gate (4/5)	323082	58 kg
Light Gate (5/6)	323083	70 kg



Security Lock 304102
For light gates

	2/3	3/4	4/5	5/6
Nominal length:	215 - 315 cm	315 - 415 cm	415 - 515 cm	515 - 615 cm
Mounted length:	195 - 295 cm	295 - 395 cm	395 - 495 cm	495 - 595 cm
Mounted length divider base section:	160 cm	260 cm	360 cm	460 cm
Mounted length divider extension section:	152 cm	152 cm	152 cm	152 cm

- Light gate for calves or young stock, height 1.15 m
- Consisting of base section and extension section, 1 lock Ø 25 mm
- Eye bolt in lower section of the base frame for easier adjustment
- 5 cross bars Ø 42.4 x 2.4 mm/33.7 x 2.5 mm

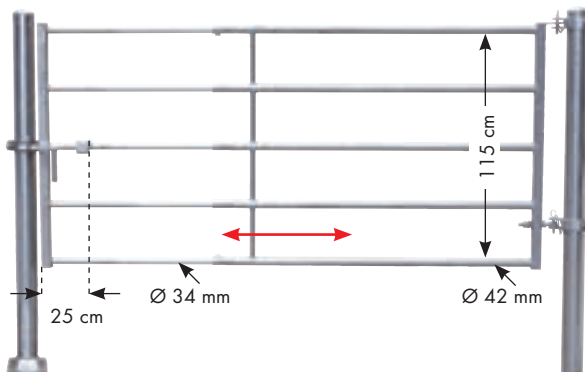


Brace 303450	5.6 kg
For gates with chain 8 m long, saddle clamp, turnbuckle, shackle and ring nut	

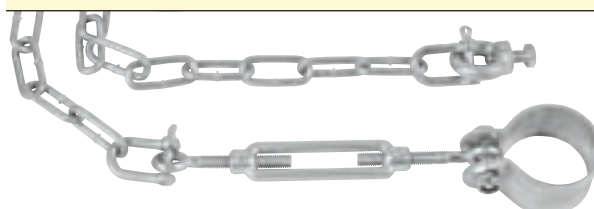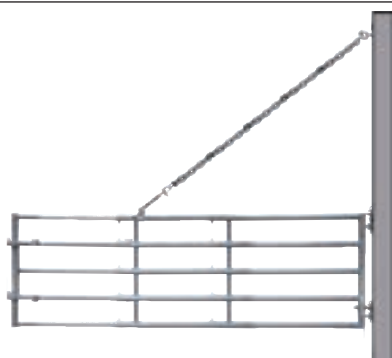


One-Way Gate 323900 14 kg

For dairy cattle at the milking parlour area
For alley width from 75 - 120 cm,
incl. end stop

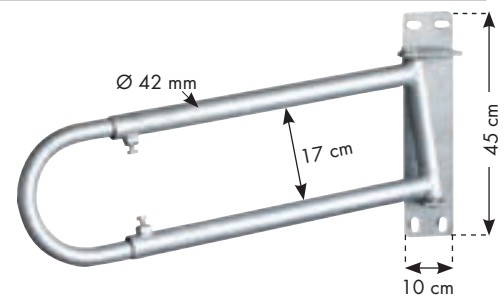

One-Way Gate, double-leaf, with frame 323902 65 kg

- The base plate allows the door to be flexibly fixed in all areas of the barn (no wall mounting required)
- Mounting on slatted floors is possible
- High operating safety: The return of the gate is only driven by gravitation, no springs or other sensitive mechanism

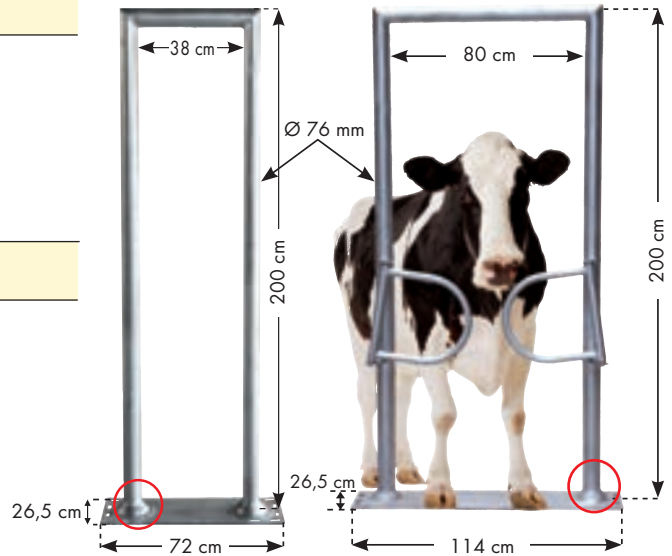

Man Escape for slatted floor 321509 44 kg

- Allows a barrier-free transition between pens even on slatted floor
- Only suitable for large cattle with a weight over 550 kg




Posts with Base Plate and Conical Reinforcement (patented)

① **Security Lock** 304102

For light gates


② **Safety Screw for feed fronts and dividers** 334285 1.0 kg

(qty 10)

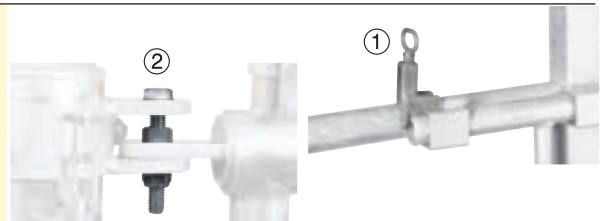

Quick-Lock TS for dividers R 304108 3.7 kg
(Incl. clamps)

Quick-Lock TS for light dividers 304107 3.6 kg
(Incl. clamps)

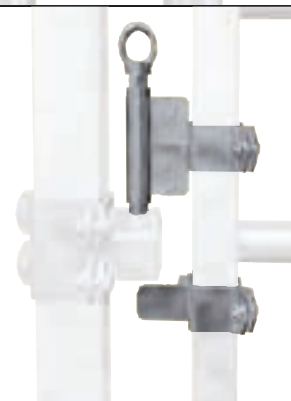


Allows to use all dividers as gates



French Innovation Award


Drop-Over Frame 303447 7.6 kg
For gates type "R",
mounting to extension section only

Drop-Over Frame 303454 6.5 kg
For light gates,
mounting to extension section only

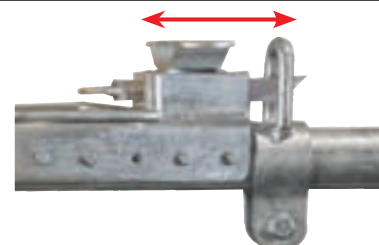

! **Total maximum gate width 8 m**



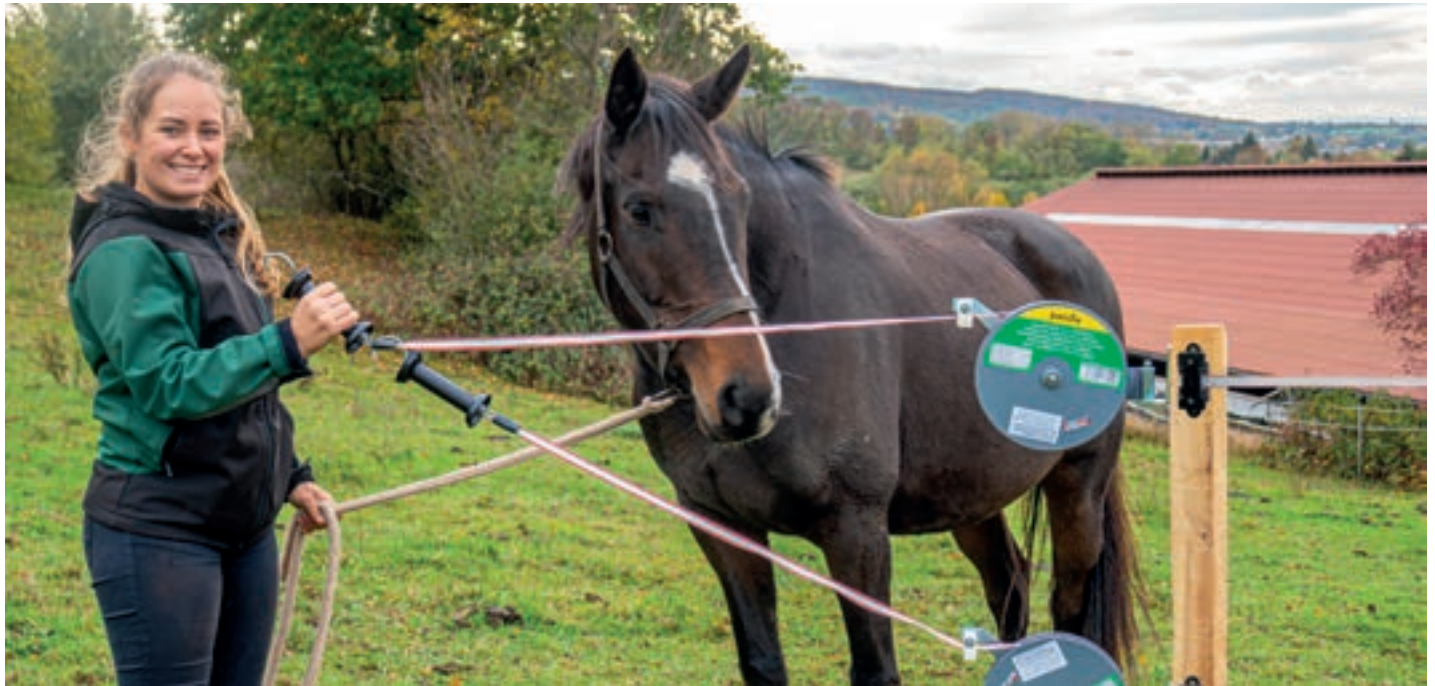

Description

Type

Ref.

Weight

①



Special Retractable Roller Gate

10 m, with tape 20 mm

641310

① 20 m, with tape 20 mm

641311

② 10 m, with tape 20 mm, turnable


641320

20 m, with tape 20 mm, turnable

641321

- Retractable Roller Gates which are steady and professional designed for the everyday use. For fast installation of flexible gates and partitions on pastures, drive paths, passage ways and paddocks.
- The 20 mm tape retracts automatically into the housing.
- Incl. Gate Handle Insulator, stainless steel.

②

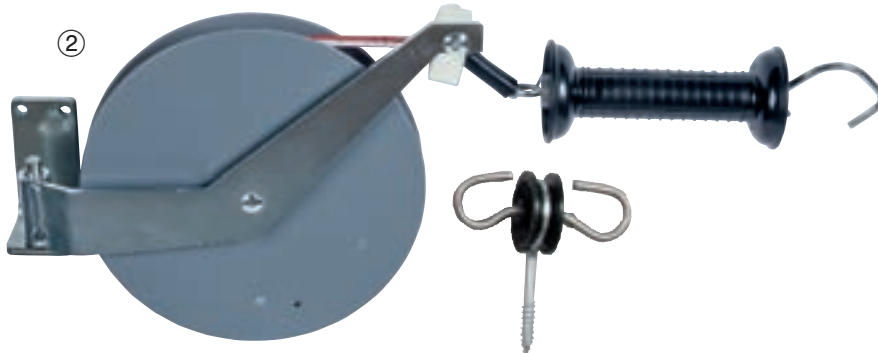



Example for One-Way Finger Gate 1.20 m:

1x	323910	Support Frame Length 1.2 m
4x	323924	Finger
1x	323925	End Part with pipe clamp
2x	323926	Mounting Bracket
2x	303306	Post 90, 2.13 m with base plate Post 90, 2.13 m with base plate
4x	323919	Saddle Clamp 90 x 90 mm
8x	341070	Anchor for slatted floor M12x235 mm

Other dimensions upon request





PATURA One-Way Finger Gate

With the one-way finger gate we offer the dairy farmer an innovative and modern way of the one-way gate, which is particularly well suited for the controlled cow traffic. Thanks to its flexible modular system, the finger gate is also used at the exit of milking robot sections, milking parlours and paddocks. It is even used in walking alleys and selection areas due to its modular system. A big benefit is the solid constructed support frame, each with a square tube 80 x 80 mm and a diam. 60.3 mm round tube. Large, durable rubber bumpers ensure maximum noise reduction when the fingers fall back. Since the fingers swing in one direction only, animals get used to the function of the gate quickly.

Type	Ref.	Weight	Description
------	------	--------	-------------

Support Frame for PATURA One-Way Finger Gate:			
Support Frame Length 1.2 m	323910	23 kg	
Support Frame Length 2 m	323911	38 kg	
Support Frame Length 3 m	323912	56 kg	
Support Frame Length 4 m	323913	75 kg	
① Finger	323924	12,2 kg	
② End Part with pipe clamp 1 each Finger Gate	323925	1,7 kg	
③ Mounting Bracket to mount to the wall, Post 102 mm or Post 90 x 90 mm	323926	5,7 kg	
④ Wall-mounted finger gate incl. rubber buffer	323921	15 kg	
Saddle Clamp 102 mm	341204		
Saddle Clamp 90 x 90 mm	323919		
Post 102, 2.13 m	303422	23 kg	
Post 90, 2.13 m	303306	26 kg	
Anchor for slatted floor M12x235 mm, round	341070		
Anchor Bolt, 12 x 110 mm, stainless steel	341215		

Width support frame = required mounting length for the whole finger gate

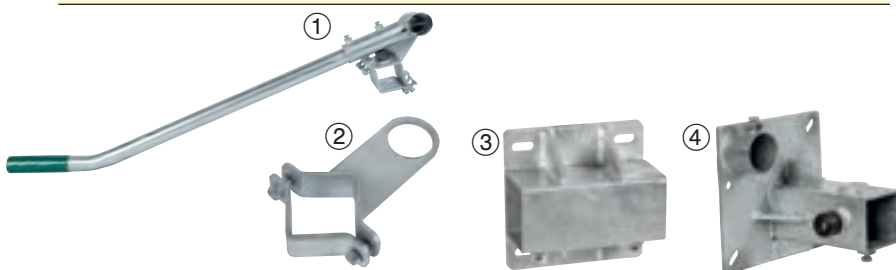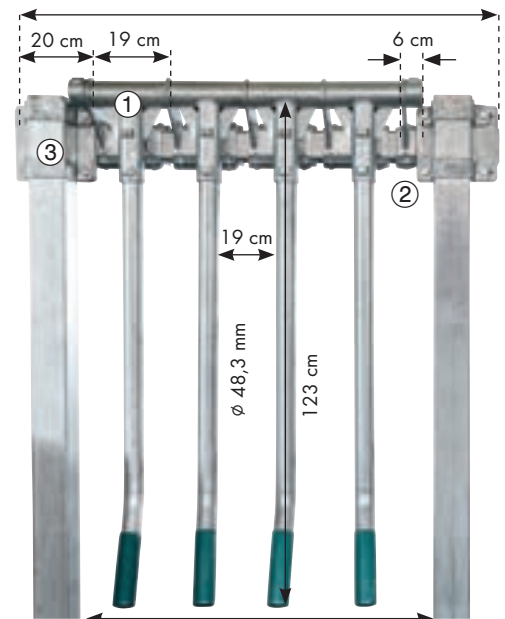

! Clear height of 2.00 m is crucial





Lift Gate

Area of use: where gates cannot swing freely, e.g. in front of waiting areas or at transit areas

- Transit widths of 2.00 - 4.00 m are possible
- Transit height 2.10 m when mounted at alley height
- Overall height 2.83 m
- Incl. Post with base plate (250x350 mm) for slotted floor
- Tabs for additional fastening options

Description	Type	Ref.	Weight
	Vertical Lift Gate for working alley	323901	165 kg

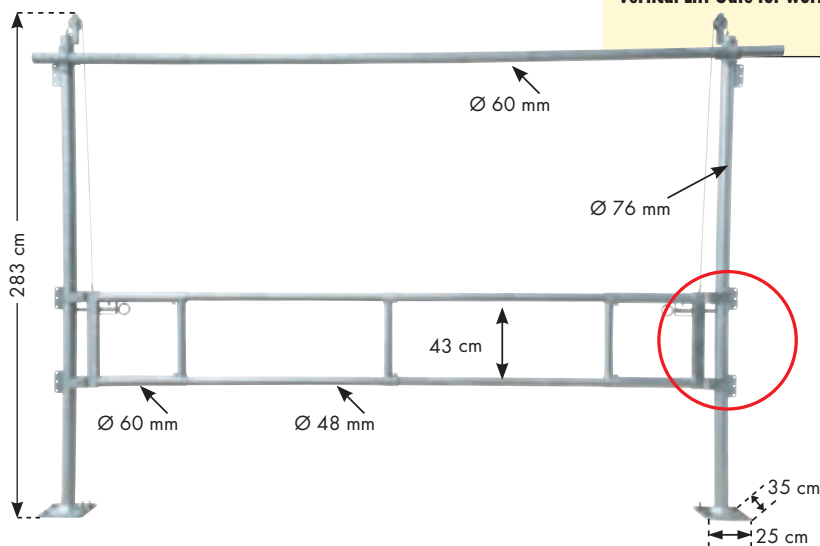

Mounting brackets for additional mounting options

<p>Safe and easy rope-guided system</p>	<p>Even more stability due to welded tubes Locking trough spring-loaded bolts</p>	<p>Post with base plate for slotted floor</p>	<p>Shorter tubes offer adjustable widths</p>
---	---	---	--







Telescopic Lift Gate

The PATURA Telescopic Lift Gate offers a wide variety of application possibilities, e.g. as separation for moving animals at the feed table or on gangways with different aisle widths. This lifting barrier is available in 2 sizes, is easy to install and very easy to operate thanks to the special spring mechanism.

- Mounting on posts: Use clamp 102 or clamp 90 with 1 holder in the middle
- Solid construction for high bending loads
- Can be folded up without losing space
- Quick-lock fastener, can be mounted laterally or frontally
- For mounting on walls

Type	Ref.	Weight	Description
Telescopic Lift Gate 3 - 4.5 m	323930	95 kg	
Telescopic Lift Gate 4 - 6 m	323931	110 kg	

① Additional locking for telescopic lift gate 323932 2.5 kg

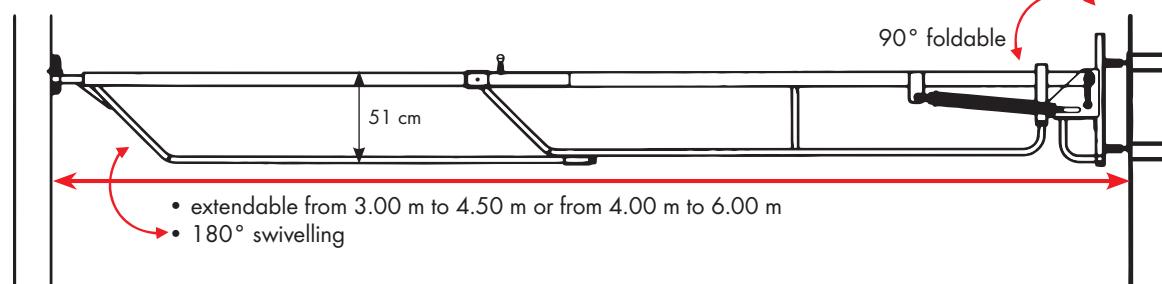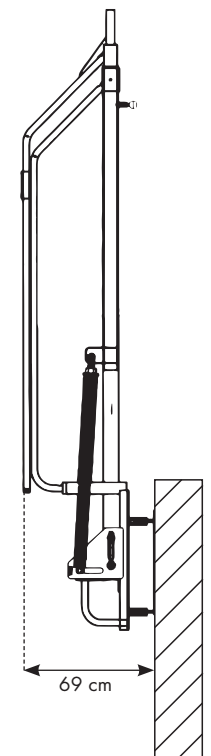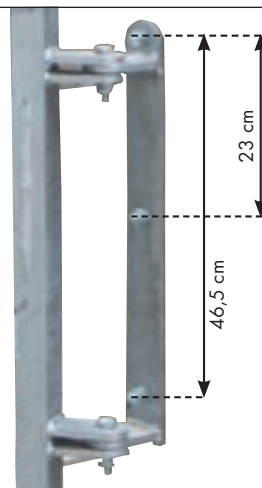




Divider and feed front for animal treatment

A new dimension in work management and safety






Get safe access to the animal in a straw pen and wherever you need to fix the animal for treatment. It is possible to retrofit this system into existing stables. Thanks to two different versions, it is available as a separate system as well as integrated in dividers. This divider allows access and treatment from both sides, right or left.

This new developed construction offers fast and safe fixation for caesarean section, pregnancy checking, operations, calving, udder problems, insemination.

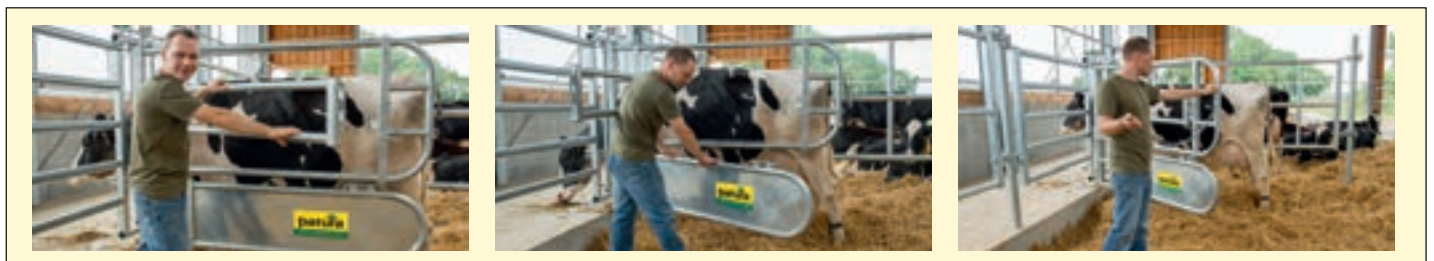Description	Type	Ref.	Weight
	Divider for animal treatment Fixation on both sides of the feed front possible	322028	69 kg
	<ul style="list-style-type: none"> • Wide access to the flank and lower abdomen of the animals • By opening the bottom part you get unrestricted access with no annoying frame • Easy to open due to spring bolts • Even for large and heavy animals • Chain with carabiner 		



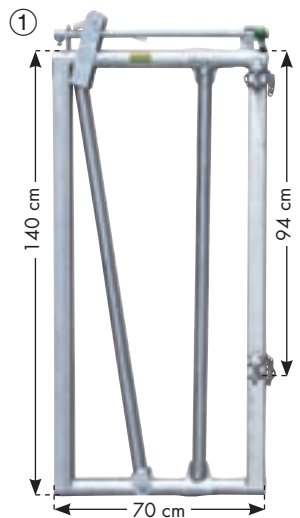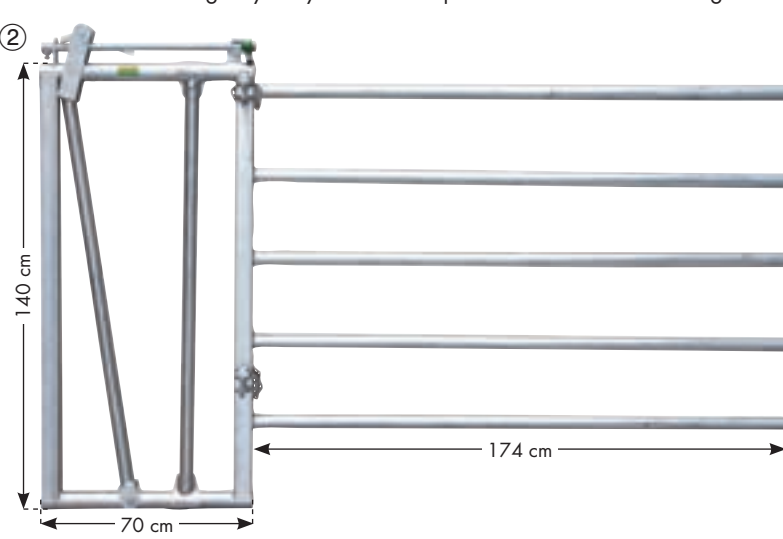

Type	Ref.	Weight	Description
① Feed Front for animal treatment For fixation 4 telescoping brackets needed	321049	38 kg	
② Feed Front for animal treatment with telescoping bracket R5 For fixation 2 telescoping brackets and 1 base section R5 needed	321048	65 kg	
<ul style="list-style-type: none"> • Lasts nearly down to the floor, so the fixed animal can lie down • The operator can lock the feed front from behind by using a rope • In the case of emergency the yoke can be opened at the bottom in one go 			
			 <p>Please order telescoping brackets, posts and assembly accessories separately!</p>
③ Telescoping Bracket Standard	334408	1.4 kg	
④ Telescoping Bracket Angled	334410	1.4 kg	
⑤ Telescoping Bracket Clamp 102 1-Way	334422	3.0 kg	
⑥ Telescoping Bracket Compact 1-Way (Wall mounting support tubes)	334406	1.3 kg	
Base Section R5 1.11 m (1/2)	323160	30 kg	
Base Section R5 1.61 m (2/3)	323161	39 kg	
Base Section R5 2.61 m (3/4)	323162	57 kg	

